

# PIEES MADEFOR MADEFOR

2023 GARAGE SERVICE EQUIPMENT & REPAIR TOOLS

# ASTON MARTIN ARAMGO GOGNIZANT FORMULA DNE TEAM

AS A CONTINUATION OF JCB'S COMMITMENT TO BRITISH MOTORSPORT, IN 2023 JCB IS PROUD TO BE SPONSOR PARTNER OF THE ASTON MARTIN ARAMCO COGNIZANT FORMULA ONE''' TEAM





# CONTENTS

ASTON MARTIN FORMULA ONE™ TEAM	2
THE STORY OF JCB	4.
TROLLEY JACKS	6
BOTTLE JACK	19
JACK STANDS	32
POSITIONING JACKS	40
PORTABLE BODY REPAIR KIT	43
ENGINE STAND-CRANE	45
HYDRAULIC PRESSES	48
AIR TOOLS	55
LASER & LEVELERS.	68
SOCKETS	72
SPANNERS	77





# THE STORY OF LEB

## THE STORY OF JCB IS ONE OF INNOVATION, AMBITION AND SHEER HARD WORK.

From small beginnings building agricultural tipping trailers in 1945, to the global force in manufacturing the company has become today, JCB has constantly pushed the boundaries in our desire to be the best. My father and company founder Joseph Cyril Bamford's motto was, "Jamais content", and that is exactly right – we are never content with our achievements. But I believe that even he would be amazed by what the company has become. Today, we have 22 plants on four continents and more than 750 dealers around the world.

These are exciting times. In just 75 years we have gone from one man in a garage in Uttoxeter to major global brand renowned for its pioneering spirit. All of this is down to our people – a 11,000-strong worldwide force that makes up the JCB family we are so proud of. Our achievements over the past 75 years have been considerable, but at JCB we believe in always looking ahead to the next development, the next level of success. As we speak, JCB is continuing to innovate and push the boundaries in research and development; in particular within the area of sustainability, where energy costs and emissions are becoming an increasingly important purchasing consideration. Many of our customers will need to reinvent their businesses to meet new building standards and emissions legislation, and we will be there to support them every step of the way, as we have always been.

Do take the time to read through the innovation milestones over the decades on the timeline below.

Lord Bamford - Chairman







#### **A MAJOR INNOVATION**

In a little less than three years since JCB started, launched Europe's first industrial front-end loader.



#### **BACKHOE BESTSELLER**

in 1985 the 3CX Sitemaster backhoe loader was launched and went on to be JCB's biggest-ever selling backhoe.



#### THE NEW ECO BACKHOE LOADER

JCB unveils its new fuel-cost cutting ECO backhoe loader. The first two machines in union jack colours to celebrate the company's 65th anniversary.



#### 100% ELECTRIC. ZERO EMISSIONS.

JCB's pioneering range of machines are 100% electric with zero emissions, zero compromise on performance and a lot less noise.



#### JCB'S FIRST CRAWLER EXCAVATOR

was manufactured under licence from Warner Swasey and powered by a Ford engine, while JCB made the undercarriage and excavator assemblies.



#### **RECORD-BREAKING DIESELMAX**

The JCB DIESELMAX streamliner was powered by two JCB 444 diesel engines producing an incredible 1500hp, achieved a record speed of 350.092mph on Bonneville Salt Flats in Utah, setting a new world land speed record for a diesel-powered car.



#### WORLD'S FASTEST TRACTOR

The JCB WFT storms into the Guinness World Records book as the world's fastest tractor with a top speed of 153.771mph (247.470kph).



#### FUELLING THE FUTURE THROUGH INNOVATION

The 50th JCB hydrogen combustion engine came off the production line as part of the development process.



# TROLEY JACKS

**CRAFTED FROM HIGH-QUALITY MATERIALS AND** WITHSTAND THE TOUGHEST E NEERED 1 1 KS ARE BUILT TO LAST. HI ΓV JAG **PROVIDE YEARS OF** M **MAKING THEM A WORTHWHILE** JE FRVICF. **INVESTMENT FOR YOUR GARAGE.** 

16

0

0

0

Ø

1



P

	T820050 TA82001		T82003 T825051	T825051	T825010R	T830020	T83006XB
	<b>1</b>			-	-		
MAX LOAD	2Т	2T	2.5T	2.5T	2T	3T	2.5T
	135MM	85MM	I30MM	85MM	89MM	I35MM	150MM
MAX HEIGHT	340MM	330MM	375MM	330MM	359MM	400MM	530MM
NET WEIGHT	8.7 KG	10.5 KG	II.8 KG	12.6KG	14.2 KG	l6.4KG	19.3KG
GROSS WEIGHT	9.4 KG	11.5 KG	12.3 KG	13,6KG	15.2 KG	I7KG	21 KG

	TH22504	TH31501	тнззоот тнз2515		TH33013	TH32006	T83502
			-				
MAX LOAD	2.25T	1.5T	зт	2.5T	3T	2T	3.5T
	I50MM	80MM	I33MM	75MM	75MM	70MM	145MM
MAX HEIGHT	530MM	355MM	465MM	505MM	505MM	610MM	500MM
NET WEIGHT	21.5KG	14.5 KG	30.7 KG	28.6 KG	35.2 KG	45.8 KG	37.2 KG
GROSS WEIGHT	23KG	16.2 KG	33.0 KG	30.4 KG	37.0 KG	48.0 KG	38.4 KG
REMARKS	LONG BODY	DOUBLE PUMP	DOUBLE PUMP	DOUBLE PUMP	DOUBLE PUMP	DOUBLE PUMP	FOOT PEDAL

	TZ830018	T83508D	TZ84007	T830028	TH32506S	TQ22001	TQ35001
				Ĵ	-	t.	, t
MAX LOAD	2.5T	3T	4T	3T	2.5T	22T	35T
	87MM	98MM	98MM	I40MM	I40MM	220MM	250MM
	455MM	535MM	508MM	525MM	677MM (W/EXT)	435MM	495MM
NET WEIGHT	33 KG	43.3 KG	43.I KG	51 KG	40 KG	45 KG	46 KG
GROSS WEIGHT	34.6 KG	45.1 KG	45.6 KG	53 KG		47 KG	48 KG
REMARKS	LOW PROFILE	DOUBLE PUMP	DOUBLE PUMP	LONG TROLLEY	SUV OFF-ROAD	HEAVY LOADING	HEAVY LOADING



RUBBER SADDLE PED

MAX. LOAD

#### **2 TONNE LOW-PROFILE TROLLEY JACK**

**CARRY HANDLE** 

SWIVEL REAR WHEELS

STURDY STEEL

CONSTRUCTION

JCB

#### **SPECIFICATION**

<u>drokokokoki</u>	
MAX. LOAD	2T
MIN. HEIGHT	135MM
MAX. HEIGHT	340MM
NET WEIGHT	8.7 KG
GROSS WEIGHT	9.4 KG
PRODUCT SIZE	447X196X135MM
PACKAGE SIZE	460X215X145MM
20' CONTAINER	I.950 PIECE
BARCODE	5056485705027

#### **FEATURES**

- With protection rubber pad
- Swive rear wheels provide smooth maneuvering and positioning
   Carry handle for convenient trasnportation
- Heavy-Duty steel construction provides stability and endurance

EXTRA LOW PROFILE DESIGN



#### **2 TONNE LOW-PROFILE TROLLEY JACK**

STURDY STEEL

CARRY HANDLE

SPECIFICATION	
MAX. LOAD	2T
MIN. HEIGHT	85MM
MAX. HEIGHT	330MM
NET WEIGHT	10.5 KG
GROSS WEIGHT	11.5 KG
PRODUCT SIZE	534X216X135MM
PACKAGE SIZE	548X230X160MM
20' CONTAINER	I.450 PIECE
BARCODE	5056485705003

#### **FEATURES**


With protection rubber pad

• Swivel rear wheels provide smooth maneuvering and positioning

• Carry handle for convenient trasnportation

Heavy-Duty steel construction provides stability and endurance
 Extra low profile design







RUBBER

SADDLE PAD







WHEELS



**TA82001** 

**T820050** 



#### **2 TONNE TROLLEY JACK**

#### **T82003**



#### **SPECIFICATION**

MAX. LOAD	2.5T
MIN. HEIGHT	130MM
MAX. HEIGHT	375MM
NET WEIGHT	11.8 KG
GROSS WEIGHT	12.3 KG
PRODUCT SIZE	531X223X132MM
PACKAGE SIZE	555X250X160M
20' CONTAINER	I.288 PIECE
BARCODE	5056485705034

#### **FEATURES**

With protection rubber pad

Swivel rear wheels provide smooth maneuvering and positioning
Heavy-Duty steel construction provides stability and endurance









#### **2 TONNE LOW-PROFILE TROLLEY JACK**





#### **SPECIFICATION**

MAX. LOAD	2.5T
MIN. HEIGHT	85MM
MAX. HEIGHT	330MM
NET WEIGHT	12.6KG
GROSS WEIGHT	13,6KG
PRODUCT SIZE	569X214X130MM
PACKAGE SIZE	613X265X150MM
20' CONTAINER	I.008 PIECE
BARCODE	5056485705010

#### **FEATURES**

• With protection rubber pad

Swivel rear wheels provide smooth maneuvering and positioning

Carry handle for convenient trasnportation
 Heavy-Duty steel construction provides stability and endurance
 Extra low profile design









RUBBER SADDLE PAD





#### **2 TONNE LOW-PROFILE TROLLEY JACK**

#### T825010R





#### 2.5 TONNE QUICK-LIFT TROLLEY JACK

#### **T83006XB**



Δ

MAX. HEIGHT 530mm MIN. HEIGHT

150n

2.25 TONNE TROLLEY JACK

#### **SPECIFICATION**

MAX. LOAD	2.5T
MIN. HEIGHT	150MM
MAX. HEIGHT	530MM
NET WEIGHT	19.3KG
GROSS WEIGHT	21 KG
PRODUCT SIZE	625X242X158MM
PACKAGE SIZE	675X285X180MM
20' CONTAINER	768 PIECE
BARCODE	5056485705058

#### **FEATURES**

• With protection rubber pad

- Swivel rear wheels provide smooth maneuvering and positioning
- Heavy-Duty steel construction provides stability and endurance
- Extra long saddle

EXTRA LONG SADDLE





#### TH22504



#### SPECIFICATION

MAX. LOAD	2.25T
MIN. HEIGHT	150MM
MAX. HEIGHT	530MM
NET WEIGHT	21.5KG
GROSS WEIGHT	23KG
PRODUCT SIZE	720X255X180MM
PACKAGE SIZE	750X275X185MM
20' CONTAINER	740 PIECE
BARCODE	5056485704471

RUBBER

#### **FEATURES**

With protection rubber pad

- Extra long body
- Extra height to use for SUVs
- Carry handle for convenient trasnportation
  Heavy-Duty steel construction provides stability and endurance
  Swivel rear wheels provide smooth maneuvering and positioning
- Swivel saddle provide smooth maneuvering and positioning
- Built-in safety valve protects against jack over-loading
  Hydraulic oil by-pass system protects ram from being over-extended • Magnetic tray

WHEELS

 $\sim$ 25 MAX. LOAD





RUBBER PAD

EXTRA LONG BODY







HANDLE STORAGE MAGNETIC TRAY



#### 1.5 TONNE LOW-PROFILE DOUBLE-PUMP ALUMINIUM JACK

TH31501



#### SPECIFICATION

MAX. LOAD	I.ST O O O O O O O O O O O O O O O
MIN. HEIGHT	80MM
MAX. HEIGHT	355MM
NET WEIGHT	14.5 KG
GROSS WEIGHT	16.2 KG
PRODUCT SIZE	550X240X130MM
PACKAGE SIZE	595X280X165MM
20' CONTAINER	940 PIECE
BARCODE	5056485704402

#### FEATURES

• Double-Piston, Quick- Lift

• With rubber pad

- Heavy-Duty aluminium construction provides stability and endurance
- Side frame carry handle for convenient transportation
- Swivel rear wheels provide smooth maneuvering and positioning
  Swivel saddle provide smooth maneuvering and positioning
- Built-in safety valve protects against jack over-loading
- Hydraulic oil by-pass system protects ram from being over-extended



#### **3 TONNE DOUBLE-PUMP TROLLEY JACK**



	DUAL PUMP
STURDY STEEL CONSTRUCTION RUBBER SADDLE PED	TOOL TRAY UCB
0	SWIVEL REAR WHEELS

#### SPECIFICATION MAX. LOAD 3T MIN. HEIGHT 133MM

	1331-11-1
MAX. HEIGHT	465MM
NET WEIGHT	30.7 KG
GROSS WEIGHT	33.0 KG
PRODUCT SIZE	682X344X155MM
PACKAGE SIZE	740X380X200MM
20' CONTAINER	470 PIECE
BARCODE	5056485704365

#### FEATURES

- Double-Piston, Quick- Lift
- With rubber pad
- Heavy-Duty steel construction provides stability and endurance
- Swivel rear wheels provide smooth maneuvering and positioning
- Swivel saddle provide smooth maneuvering and positioning
- Built-in safety valve protects against jack over-loading
- Hydraulic oil by-pass system protects ram from being over-extended











RUBBER

SADDLE PAD



SWIVEL REAR WHEELS



#### 2.5 TONNE LOW-PROFILE DOUBLE-PUMP TROLLEY JACK

#### TH32515




#### **SPECIFICATION**

MAX. LOAD	2.5T 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
MIN. HEIGHT	75MM
MAX. HEIGHT	505MM
NET WEIGHT	28.6 KG
GROSS WEIGHT	30.4 KG
PRODUCT SIZE	738X353X156MM
PACKAGE SIZE	805X370X205MM
20' CONTAINER	450 PIECE
BARCODE	5056485704372

#### **FEATURES**

- Double-Piston, Quick- Lift
- With rubber pad
- Extra Low-Profile Design
- Heavy-Duty steel construction provides stability and endurance
- Swivel rear wheels provide smooth maneuvering and positioning
- Swivel saddle provide smooth maneuvering and positioning
  Built-in safety valve protects against jack over-loading
- Hydraulic oil by-pass system protects ram from being over-extended











SADDLE PAD



SWIVEL REAR WHEELS

TH33013

#### **3 TONNE LOW-PROFILE DOUBLE-PUMP TROLLEY JACK**



#### SPECIFICATION

MAX. LOAD	ЗТО-О-О-О-О-О-О-О-О-О-О-О-О-О-О-О-О-О-О-
MIN. HEIGHT	75MM
MAX. HEIGHT	505MM
NET WEIGHT	35.2 KG
GROSS WEIGHT	37.0 KG
PRODUCT SIZE	738X353X156MM
PACKAGE SIZE	805X370X205MM
20' CONTAINER	450 PIECE
BARCODE	5056485704372

#### **FEATURES**

- Double-Piston, Quick- Lift
- With rubber pad
- Heavy-Duty steel construction provides stability and endurance
- Swivel rear wheels provide smooth maneuvering and positioning


DUAL

PUMP

- Swivel saddle provide smooth maneuvering and positioning
- Built-in safety valve protects against jack over-loading
- Hydraulic oil by-pass system protects ram from being over-extended















SWIVEL REAR WHEELS



#### 2 TONNE LOW-PROFILE DOUBLE-PUMP LONG JACK

#### TH32006



#### SPECIFICATION

MAX. LOAD	2T 2
MIN. HEIGHT	70MM
MAX. HEIGHT	610MM
NET WEIGHT	45.8 KG
GROSS WEIGHT	48.0 KG
PRODUCT SIZE	915X372X160MM
PACKAGE SIZE	960X410X210MM
20' CONTAINER	320 PIECE
BARCODE	5056485704471
JAJANAJANJAJA	

#### FEATURES

• Double-Piston, Quick- Lift

• With rubber pad

- $\ensuremath{\,^\circ}$  Heavy-Duty steel construction provides stability and endurance
- Swivel rear wheels provide smooth maneuvering and positioning
- Swivel saddle provide smooth maneuvering and positioning
- Built-in safety valve protects against jack over-loading
- Hydraulic oil by-pass system protects ram from being over-extended



#### **3.5 TONNE QUICK-LIFT TROLLEY JACK**





SPECIFICATION	
MAX. LOAD	3.5T
MIN. HEIGHT	145MM
MAX. HEIGHT	500MM
NET WEIGHT	37.2 KG
GROSS WEIGHT	38.4 KG
PRODUCT SIZE	685X346X180MM
PACKAGE SIZE	740X380X205MM
20' CONTAINER	495 PIECE
BARCODE	5056485705065

#### FEATURES

• With protection rubber pad

• Swivel rear wheels provide smooth maneuvering and positioning

- Heavy-Duty steel construction provides stability and endurance
- With quick stroke thanks to separate bypass pump (foot pedal)











#### 2.5 TONNE LOW-PROFILE TROLLEY JACK

#### TZ830018



#### **SPECIFICATION**

MAX. LOAD	2.5T				
MIN. HEIGHT	87MM				
MAX. HEIGHT	455MM				
NET WEIGHT	33 KG				
GROSS WEIGHT	34.6 KG				
PRODUCT SIZE	640X342X175MM				
PACKAGE SIZE	700X390X215MM				
20' CONTAINER	480 PIECE				
BARCODE	5056485705072				

#### FEATURES

• With protection rubber pad

- Swivel rear wheels provide smooth maneuvering and positioning
  Heavy-Duty steel construction provides stability and endurance
  Extra low profile design











SWIVEL REAR WHEELS

T83508D

#### **3 TONNE LOW-PROFILE DOUBLE-PUMP TROLLEY JACK**



#### SPECIFICATION

XOXOXOXOXOXOXO	<u>XOXOXOXOXOXOXOXOXOX</u>				
MAX. LOAD	ЗТ				
MIN. HEIGHT	98MM				
MAX. HEIGHT	535MM				
NET WEIGHT	43.3 KG				
GROSS WEIGHT	45.I KG				
PRODUCT SIZE	750X345X170MM				
PACKAGE SIZE	815X400X200MM				
20' CONTAINER	385 PIECE				
BARCODE	5056485705089				


#### FEATURES

With protection rubber pad

- Swivel rear wheels provide smooth maneuvering and positioning
- Heavy-Duty steel construction provides stability and endurance

Extra low profile design
Double-Piston, Quick- Lift









DUAL PUMP



SADDLE PAD



SWIVEL REAR WHEELS



CONSTRUCTION

RUBBER SADDLE PED

#### 4 TONNE TROLLEY JACK



DUAL





- With protection rubber pad
- Swivel rear wheels provide smooth maneuvering and positioning
- Heavy-Duty steel construction provides stability and endurance
  - Extra low profile designDouble-Piston, Quick- Lift



#### **3 TONNE HEAVY-DUTY LONG TROLLEY JACK**

SWIVEL REAR

WHEELS

# STURDY STEEL CONSTRUCTION RUBBER SADDLE PED CONSTRUCTION SAUVEL REAR WHEELS

SPECIFICATION				
MAX. LOAD	3T. OCONOCIONO CONOCIONA			
MIN. HEIGHT	I40MM			
MAX. HEIGHT	525MM			
NET WEIGHT	5I KG			
GROSS WEIGHT	53 KG			
RAM LIFT:	IIOMM			
SCREW EXTEND	105MM			
AIR PRESSURE	0.7-1.2MPA			
PACKAGE SIZE	1280X410X240MM			
20' CONTAINER	I60 PIECE			
BARCODE	5056485705102			

#### FEATURES

With protection rubber pad

Swivel rear wheels provide smooth maneuvering and positioning
Heavy-Duty steel construction provides stability and endurance







RUBBER SADDLE PAD



**T830028** 



#### 2.5 TONNE SUV ALUMINIUM TROLLEY JACK

#### TH32506S



#### SPECIFICATION

MAX. LOAD	2.5T
MIN. HEIGHT	I40MM
MAX. HEIGHT	525MM
MIN. HEIGHT WITH EXTENSION	292MM
MAX. HEIGHT WITH EXTENSION	677MM
WEIGHT	40KG
BARCODE	5056485705447

#### **FEATURES**

- Aluminium construction Off road wheels
- Dual pump
  2x Saddle extension





#### 22 TONNE AIR TROLLEY JACK

# HANDLE KNOB T HANDLE POSITION RELEASE SADDLE ADAPTERS AIR INLET

#### SPECIFICATION

MAX. LOAD	22T
MIN. HEIGHT	220MM
MAX. HEIGHT	435MM
NET WEIGHT	45 KG
GROSS WEIGHT	47 KG
RAM LIFT:	IIOMM
SCREW EXTEND	105MM
AIR PRESSURE	0.7-1.2MPA
PACKAGE SIZE	675X390X260MM
20' CONTAINER	352 PIECE
BARCODE	5056485705119
KOKOKOKOKOK	(DXDXDXDXDXDXDXDXDXDXDXDXDX







**3X** 

SADDLE EXTENSION ADAPTER

TQ35001


TQ22001

#### **35 TONNE AIR TROLLEY JACK**



SPECIFICATION	
MAX. LOAD	35T
MIN. HEIGHT	250MM
MAX. HEIGHT	495MM
NET WEIGHT	46 KG
GROSS WEIGHT	48 KG
RAM LIFT:	130MM
SCREW EXTEND	II5MM
AIR PRESSURE	0.7-1.2MPA
PACKAGE SIZE	675X390X260MM
20' CONTAINER	350 PIECE
BARCODE	5056485705126










SADDLE EXTENSION ADAPTER



# BUTTEJACK

Re

HEAVY-DUTY LIFTING. THESE JACKS ARE THE **DESIGNED FOR** JCB'S COMMI AND DE STEEL DLE EVEN 1 F **I** 100 CONSTRUCTION INDUSTRIES. FARMING **NR** AUTAMATIVE

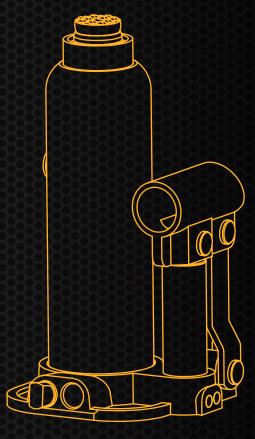

0

00

П

10





	TH90204 TH90304		TH90504 TH90804		ТН91004	TH91204	TH91504
MAX LOAD	2T	3T	5T	8T	ют	I2T	I5T
MIN HEIGHT	I00MM	188MM	207MM	222MM	220MM	230MM	230MM
MAX HEIGHT	316MM	363MM	402MM	447MM	450MM	460MM	460MM
NET WEIGHT	2.0 KG	2.8 KG	3.7 KG	4.8 KG	4.8 KG	6.0 KG	7.0 KG
GROSS WEIGHT	2.1 KG	2.97 KG	3.92 KG	4.94 KG	4.94 KG	6.18 KG	7.13 KG

	ТН92004	ТН93204	TH95004	TH902001	TH903501	TH905001	TH908001
MAX LOAD	20Т	32T	50T	2Т	3.5T	5T	8T
	240MM	260MM	280MM	I72MM	I72MM	218MM	220MM
MAX HEIGHT	450MM	420MM	450MM	372MM	372MM	474MM	488MM
	8.6 KG	17.8 KG	25.8 KG	3.79 KG	3.79 KG	4.89 KG	7.37 KG
GROSS WEIGHT	9.0 KG	18.5 KG	26.05 KG	3.95 KG	3.95 KG	5.05 KG	7.56 KG
REMARKS				HEAVY DUTY	HEAVY DUTY	HEAVY DUTY	HEAVY DUTY

	TH910001	ТН915001 ТН920001	TH920001	TH930001	TQ12007	TQ20007	TQ30007
					<u></u>		<u>į</u>
MAX LOAD	Іот	I5T	20T	зот	I2T	20T	30T
	220MM	280MM	24IMM	244MM	260MM	255MM	265MM
MAX HEIGHT	488MM	508MM	525MM	510MM	500MM	500MM	500MM
NET WEIGHT	7.37 KG	9.87 KG	13.07 KG	15.77 KG	I2 KG	I7 KG	22 KG
GROSS WEIGHT	7.56 KG	10.12 KG	13.32 KG	16.11 KG	I3 KG	18 KG	23.5 KG
REMARKS	HEAVY DUTY	HEAVY DUTY	HEAVY DUTY	HEAVY DUTY	PNEUMATIC	PNEUMATIC	PNEUMATIC



#### TH90204

TH90304



#### SPECIFICATION

MAX. LOAD	2T OXOXOXOXOXOXOXOXOX
MIN. HEIGHT (A)	100MM
MAX. HEIGHT (D)	316MM
LIFT HEIGHT (B)	108MM
ADJUSTABLE HEIGHT (C)	48MM
NET WEIGHT	2.0 KG
GROSS WEIGHT	2.1 KG
PRODUCT SIZE	168X108X48MM
PACKAGE SIZE	340X235X205MM
20' CONTAINER	9.228 PIECE
BARCODE	5056485704785

#### **FEATURES**

• Steel plate instead of cast iron for environment protection

- Preventing from oil leakage
- Oil remaining clear after using



#### **3 TONNE BOTTLE JACK**



#### SPECIFICATION

MAX. LOAD	а зт. 20202020202020202020
MIN. HEIGHT (A)	I88MM
MAX. HEIGHT (D)	363MM
LIFT HEIGHT (B)	II5MM
ADJUSTABLE HEIGHT (C)	60MM
NET WEIGHT	2.8 KG
GROSS WEIGHT	2.97 KG
PRODUCT SIZE	188X115X60MM
PACKAGE SIZE	375X265X225MM
20' CONTAINER	6.150 PIECE
BARCODE	5056485704792

#### **FEATURES**

• Steel plate instead of cast iron for environment protection

• Preventing from oil leakage

• Oil remaining clear after using









 $\bigcirc$ 

MAX. LOAD

#### TH90504



#### SPECIFICATION

MAX. LOAD	ST CONCERNENCE OF CONCERNENCE
MIN. HEIGHT (A)	207MM
MAX. HEIGHT (D)	402MM
LIFT HEIGHT (B)	125MM
ADJUSTABLE HEIGHT (C)	70MM
NET WEIGHT	3.7 KG
GROSS WEIGHT	3.92 KG
PRODUCT SIZE	207X125X70MM
PACKAGE SIZE	280X265X25
20' CONTAINER	4.920 PIECE
BARCODE	5056485704808

#### **FEATURES**

в

- Steel plate instead of cast iron for environment protection
- Preventing from oil leakage
- Oil remaining clear after using





**8 TONNE BOTTLE JACK** 





#### TH90804



#### SPECIFICATION MAX. LOAD 8T MIN. HEIGHT (A) 222MM 447MM MAX. HEIGHT (D) 145MM LIFT HEIGHT (B) ADJUSTABLE HEIGHT (C) 80MM NET WEIGHT 4.8 KG **GROSS WEIGHT** 4.94 KG PRODUCT SIZE 222X145X80MM PACKAGE SIZE 295X275X260MM 20' CONTAINER 3.960 PIECE BARCODE 5056485704815

#### FEATURES

в

• Steel plate instead of cast iron for environment protection

- Preventing from oil leakage
- Oil remaining clear after using







 $\bigcirc$ 

**8T** MAX. LOAD

#### TH91004



#### SPECIFICATION

MAX. LOAD	ΙΟΤ	
MIN. HEIGHT (A)	222MM	
MAX. HEIGHT (D)	450MM	
LIFT HEIGHT (B)	145MM	
ADJUSTABLE HEIGHT (C)	80MM	
NET WEIGHT	4.8 KG	
GROSS WEIGHT	4.94 KG	
PRODUCT SIZE	222X145X80MM	
PACKAGE SIZE	295X275X260MM	
20' CONTAINER	3.960 PIECE	
BARCODE	5056485704822	

#### **FEATURES**

в

• Steel plate instead of cast iron for environment protection

C

- Preventing from oil leakage
- Oil remaining clear after using



#### **12 TONNE BOTTLE JACK**



#### SPECIFICATION

I2T O COLO COLO COLO COLO COLO COLO COLO C
230MM
460MM
150MM
80MM
6.0KG
6.18 KG
230X150X80MM
415X165X265MM
3.256 PIECE
5056485704839

#### **FEATURES**

• Steel plate instead of cast iron for environment protection

• Preventing from oil leakage

• Oil remaining clear after using





D

**TH91204** 













## ADJUSTING SCREW LIFTING PRESSING HANDLE CYLINDER PUMP SOCKET JCB TH91504 8:50 RELEASE VALVE

#### TH91504



MAX. LOAD	
MIN. HEIGHT (A)	230MM
MAX. HEIGHT (D)	460MM
LIFT HEIGHT (B)	I50MM
ADJUSTABLE HEIGHT (C)	80MM
NET WEIGHT	7.0KG
GROSS WEIGHT	7.13 KG
PRODUCT SIZE	230X150X80MM
PACKAGE SIZE	300X180X270MM
20' CONTAINER	2.738 PIECE
BARCODE	5056485704846

c

#### **FEATURES**

в

- Steel plate instead of cast iron for environment protection
- Preventing from oil leakage
- Oil remaining clear after using





#### **20 TONNE BOTTLE JACK**



# TH92004

SPECIFICATION	
MAX. LOAD	207
MIN. HEIGHT (A)	240MM
MAX. HEIGHT (D)	450MM
LIFT HEIGHT (B)	150MM
ADJUSTABLE HEIGHT (C)	60MM
NET WEIGHT	8.6 KG
GROSS WEIGHT	9.0 KG
PRODUCT SIZE	240X150X60MM
PACKAGE SIZE	315X185X275MM
20' CONTAINER	2.172 PIECE
BARCODE	5056485704853

#### **FEATURES**

B

• Steel plate instead of cast iron for environment protection

- Preventing from oil leakage
- Oil remaining clear after using





D







#### TH93204



#### SPECIFICATION

MAX. LOAD	32T	
MIN. HEIGHT (A)	260MM	
MAX. HEIGHT (D)	420MM	
LIFT HEIGHT (B)	I60MM	
ADJUSTABLE HEIGHT (C)	MM (-")	
NET WEIGHT	17.8 KG	
GROSS WEIGHT	18.5 KG	
PRODUCT SIZE	260X160X -MM	
PACKAGE SIZE	220X200X300MM	
20' CONTAINER	I.086 PIECE	
BARCODE	5056485704860	

#### **FEATURES**

в

• Steel plate instead of cast iron for environment protection

C

- Preventing from oil leakage
- Oil remaining clear after using



## 50 TONNE BOTTLE JACK



#### SPECIFICATION

MAX. LOAD	50T
MIN. HEIGHT (A)	280MM
MAX. HEIGHT (D)	450MM
LIFT HEIGHT (B)	170MM
ADJUSTABLE HEIGHT (C)	- MM (-")
NET WEIGHT	25.8 KG
GROSS WEIGHT	26.05 KG
PRODUCT SIZE	280X170X -MM
PACKAGE SIZE	240X220X3I5MM
20' CONTAINER	757 PIECE
BARCODE	5056485704877

#### **FEATURES**

• Steel plate instead of cast iron for environment protection

- Preventing from oil leakage
- Oil remaining clear after using












D

TH95004

## JCB


#### 2 TONNE HEAVY-DUTY BOTTLE JACK

## ADJUSTING SCREW PRESSING HANDLE PUMP SOCKET LIFTING CYLINDER JCB TH902001 RELEASE VALVE



#### **3.5 TONNE HEAVY-DUTY BOTTLE JACK**





#### SPECIFICATION

MAX. LOAD	2T 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
MIN. HEIGHT (A)	172MM
MAX. HEIGHT (D)	372MM
LENGTH (B)	88MM
LENGTH (C)	II2 MM
WIDTH (E)	28MM
BASE (F)	103X105MM
NET WEIGHT	3.79 KG
GROSS WEIGHT	3.95 KG
PACKAGE SIZE	375X290X225MM
20' CONTAINER	4.248 PIECE
BARCODE	5056485704884

TH902001

#### **FEATURES**

Zinc plated long handle allows ease of pumping.

• Welded construction NO LEAK.

- Safety valve prevents the ram from being overextended and causing damage to the cylinder. Inner safety valve prevent the user to adjust the system.
- . Prevent rust with ENP (electroless nickel plating) ram piston, make it smooth, bright & long life.
- . Double seals in the pump to prevent the oil leak.
- Light Weight forged base provides more steel only where strength is required.
- . Better, stronger design with the tank welded directly to the forged base.
- Longer life than normal screw connection jack due to smooth bearing surfaces and close tolerances.
- Carrying handles on big capacity jack for easy transport.

#### SPECIFICATION

SILCINCATION				
MAX. LOAD	3.5T			
MIN. HEIGHT (A)	172MM			
MAX. HEIGHT (D)	372MM			
LENGTH (B)	88MM			
LENGTH (C)	II2 MM			
WIDTH (E)	28MM			
BASE (F)	103X105MM			
NET WEIGHT	3.79 KG			
GROSS WEIGHT	3.95 KG			
PACKAGE SIZE	75X290X225MM			
20' CONTAINER	4.248 PIECE			
BARCODE	5056485704891			

#### **FEATURES**

- Zinc plated long handle allows ease of pumping.
- Welded construction NO LEAK.
- Safety valve prevents the ram from being overextended and causing damage to the cylinder.
- Inner safety valve prevent the user to adjust the system.
- Prevent rust with ENP (electroless nickel plating) ram piston, make it smooth, bright & long life.
- Double seals in the pump to prevent the oil leak.
- Light Weight forged base provides more steel only where strength is required.
- Better, stronger design with the tank welded directly to the forged base. •
- Longer life than normal screw connection jack due to smooth bearing surfaces and close tolerances.
- Carrying handles on big capacity jack for easy transport.



TH903501




TH905001

**TH908001** 


#### **5 TONNE HEAVY-DUTY BOTTLE JACK**

# ADJUSTING SCREW LIFTING CYLINDER PUMP SOCKET PUMP SOCKET RELEASE VALVE

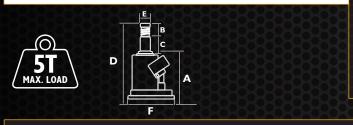

#### **8 TONNE HEAVY-DUTY BOTTLE JACK**

# ADJUSTING SCREW LIFTING CYLINDER PUMP SOCKET PUMP SOCKET RELEASE VALVE



#### SPECIFICATION

MAX. LOAD	STOCOCOCOCOCOCOCOCOCO			
MIN. HEIGHT (A)	218MM			
MAX. HEIGHT (D)	474MM			
LENGTH (B)	II0MM			
LENGTH (C)	146MM			
WIDTH (E)	32MM			
BASE (F)	10X112MM			
NET WEIGHT	4.89 KG			
GROSS WEIGHT	5.05 KG			
PACKAGE SIZE	405X300X260MM			
20' CONTAINER	3.324 PIECE			
BARCODE	5056485704884			

#### FEATURES

•

Zinc plated long handle allows ease of pumping.

Welded construction NO LEAK.

- Safety valve prevents the ram from being overextended and causing damage to the cylinder.
- Inner safety valve prevent the user to adjust the system.
- Prevent rust with ENP (electroless nickel plating) ram piston, make it smooth, bright & long life.
- Double seals in the pump to prevent the oil leak.
- Light Weight forged base provides more steel only where strength is required.
- Better, stronger design with the tank welded directly to the forged base.
- Longer life than normal screw connection jack due to smooth bearing surfaces and close tolerances.
- Carrying handles on big capacity jack for easy transport.

#### SPECIFICATION

MAX. LOAD	8T
MIN. HEIGHT (A)	220MM
MAX. HEIGHT (D)	488MM
LENGTH (B)	II5MM
LENGTH (C)	153MM
WIDTH (E)	48MM
BASE (F)	124X127.5MM
NET WEIGHT	7.37 KG
GROSS WEIGHT	7.56 KG
PACKAGE SIZE	755X185X270MM
20' CONTAINER	2.220 PIECE
BARCODE	5056485704914


#### FEATURES

- Zinc plated long handle allows ease of pumping.
- Welded construction NO LEAK.
- Safety valve prevents the ram from being overextended and causing damage to the cylinder.
- Inner safety valve prevent the user to adjust the system.
- Prevent rust with ENP (electroless nickel plating) ram piston, make it smooth, bright & long life.
- Double seals in the pump to prevent the oil leak.
- Light Weight forged base provides more steel only where strength is required.
- Better, stronger design with the tank welded directly to the forged base.
- Longer life than normal screw connection jack due to smooth bearing surfaces and close tolerances.
- Carrying handles on big capacity jack for easy transport.




#### **10 TONNE HEAVY-DUTY BOTTLE JACK**

# ADJUSTING SCREW LIFTING CYLINDER PUMP SOCKET PUMP SOCKET RELEASE VALVE



#### **15 TONNE HEAVY-DUTY BOTTLE JACK**

# <complex-block>



#### SPECIFICATION

MAX. LOAD	IOT			
MIN. HEIGHT (A)	220MM			
MAX. HEIGHT (D)	488MM			
LENGTH (B)	II5MM			
LENGTH (C)	153MM			
WIDTH (E)	48MM			
BASE (F)	124X127.5MM			
NET WEIGHT	7.37 KG			
GROSS WEIGHT	7.56 KG			
PACKAGE SIZE	755X185X270MM			
20' CONTAINER	2.220 PIECE			
BARCODE	5056485704921			

#### FEATURES

•

•

- Zinc plated long handle allows ease of pumping.
- Welded construction NO LEAK.
- Safety valve prevents the ram from being overextended and causing damage to the cylinder. Inner safety valve prevent the user to adjust the system.
- Prevent rust with ENP (electroless nickel plating) ram piston, make it smooth, bright & long life.
- Double seals in the pump to prevent the oil leak.
- Light Weight forged base provides more steel only where strength is required.
- Better, stronger design with the tank welded directly to the forged base.
- Longer life than normal screw connection jack due to smooth bearing surfaces and close tolerances.
- Carrying handles on big capacity jack for easy transport.

#### SPECIFICATION

ST LON IOANON	<u>Uauauauauauauauauauau</u> a
MAX. LOAD	IST
MIN. HEIGHT (A)	280MM
MAX. HEIGHT (D)	508MM
LENGTH (B)	II3MM
LENGTH (C)	160MM
WIDTH (E)	58MM
BASE (F)	140X142MM
NET WEIGHT	9.87 KG
GROSS WEIGHT	10.12 KG
PACKAGE SIZE	790X190X575MM
20' CONTAINER	I.660 PIECE
BARCODE	5056485704938

#### FEATURES

- Zinc plated long handle allows ease of pumping.
- Welded construction NO LEAK.
- Safety valve prevents the ram from being overextended and causing damage to the cylinder.
  Inner safety valve prevent the user to adjust the system.
- Prevent rust with ENP (electroless nickel plating) ram piston, make it smooth, bright & long life.
- Double seals in the pump to prevent the oil leak.
- Light Weight forged base provides more steel only where strength is required.
- Better, stronger design with the tank welded directly to the forged base.
- Longer life than normal screw connection jack due to smooth bearing surfaces and close tolerances.
- Carrying handles on big capacity jack for easy transport.

TH915001

TH910001



#### **20 TONNE HEAVY-DUTY BOTTLE JACK**

#### TH920001





#### SPECIFICATION

MAX. LOAD	20T
MIN. HEIGHT (A)	240MM
MAX. HEIGHT (D)	515MM
LENGTH (B)	II0MM
LENGTH (C)	165MM
WIDTH (E)	60MM
BASE (F)	165X161MM
NET WEIGHT	13.07 KG
GROSS WEIGHT	13.32 KG
PACKAGE SIZE	710X205X290MM
20' CONTAINER	1.260 PIECE
BARCODE	5056485704945

#### FEATURES

•

• Zinc plated long handle allows ease of pumping.


Welded construction NO LEAK.

- Safety valve prevents the ram from being overextended and causing damage to the cylinder.
- Inner safety valve prevent the user to adjust the system.
- Prevent rust with ENP (electroless nickel plating) ram piston, make it smooth, bright & long life.
- Double seals in the pump to prevent the oil leak.
- Light Weight forged base provides more steel only where strength is required.
- Better, stronger design with the tank welded directly to the forged base.
- Longer life than normal screw connection jack due to smooth bearing surfaces and close tolerances.
- Carrying handles on big capacity jack for easy transport.

#### **30 TONNE HEAVY-DUTY BOTTLE JACK**

#### тнэзооо1





#### SPECIFICATION

MAX. LOAD	30T
MIN. HEIGHT (A)	244MM
MAX. HEIGHT (D)	510MM
LENGTH (B)	II0MM
LENGTH (C)	160MM
WIDTH (E)	65MM
BASE (F)	186X174MM
NET WEIGHT	15.77 KG
GROSS WEIGHT	16.11 KG
PACKAGE SIZE	585X215X285MM
20' CONTAINER	I.04I PIECE
BARCODE	5056485704945

#### FEATURES

- Zinc plated long handle allows ease of pumping.
- Welded construction NO LEAK.
- Safety valve prevents the ram from being overextended and causing damage to the cylinder.
- Inner safety valve prevent the user to adjust the system.
- Prevent rust with ENP (electroless nickel plating) ram piston, make it smooth, bright & long life.
- Double seals in the pump to prevent the oil leak.
- Light Weight forged base provides more steel only where strength is required.
- Better, stronger design with the tank welded directly to the forged base.
- Longer life than normal screw connection jack due to smooth bearing surfaces and close tolerances.
- Carrying handles on big capacity jack for easy transport.

#### **12 TONNE AIR BOTTLE JACK**



#### TQ12007

#### **SPECIFICATION**

MAX. LOAD	127 0 0 0 0 0 0 0 0 0 0 0			
MIN. HEIGHT	260MM			
MAX. HEIGHT	500MM			
ADJUSTABLE HEIGHT	80MM			
NET WEIGHT	12 KG			
GROSS WEIGHT	13 KG			
PACKAGE SIZE	280X170X295MM			
20' CONTAINER	I.290 PIECE			
BARCODE	5056485704969			


#### **FEATURES**

Chrome plated cylinder ram.
High quality aluminium air pump.
Welded construction.





#### **20 TONNE AIR BOTTLE JACK**



STABLE BASE

#### SPECIFICATION

MAX. LOAD	20T			
MIN. HEIGHT	255MM			
MAX. HEIGHT	500MM			
ADJUSTABLE HEIGHT	80MM			
NET WEIGHT	17 KG			
GROSS WEIGHT	18 KG			
PACKAGE SIZE	300X190X285MM			
20' CONTAINER	930 PIECE			
BARCODE	5056485704976			

500мм

MAX HEIGHT

TQ20007

#### **FEATURES**

Chrome plated cylinder ram.
High quality aluminium air pump.
Welded construction.









TQ30007

#### **30 TONNE AIR BOTTLE JACK**

# SLOTTED SADDLE AIR PUMP RETRACTABLE SPRINGS PUSH-BUTTON TRIGGER STABLE BASE

#### SPECIFICATION

<u>YOYOYOYOYOYOY</u>	<u>DYOXOXOXOXOXOXOXOX</u>			
MAX. LOAD	30Т			
MIN. HEIGHT	265MM			
MAX. HEIGHT	500MM			
ADJUSTABLE HEIGHT	100MM			
NET WEIGHT	22 KG			
GROSS WEIGHT	23.5 KG			
PACKAGE SIZE	310X205X295MM			
20' CONTAINER	710 PIECE			
BARCODE	5056485704983			

#### **FEATURES**

- Chrome plated cylinder ram.
  High quality aluminium air pump.
  Welded construction.





#### **2 TONNE SCISSOR JACK**



#### T10202



#### SPECIFICATION

MAX. LOAD	2T 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
MIN HEIGHT	120MM
MAX HEIGHT	395MM
NET WEIGHT	3.5KG
BARCODE	5056485705317

#### **FEATURES**

• Made of high-quality steel for strength and durability Wide, thickened base

Solid screw

• Antioxidant spray paint







STEEL SHAFT



# JAGK STANDS

THESE RUGGED, RELIABLE JCB JACK STANDS PROVIDE FIRM, STEADY SUPPORT, ALLOWING YOU TO WORK WITH CONFIDENCE. WITH AN ADJUSTABLE HEIGHT FEATURE, THEY CATER TO A WIDE RANGE OF APPLICATIONS AND VEHICLE SIZES.

	TH52011     TH53013       Image: Constraint of the second s	TH52002C TH53003E	TH56002A	5 T410001	TZ100001		
		44	**			林	١.
MAX LOAD	2T	3T 0	2T	3T)	6Т	о о ю	
	265MM	3IOMM	278MM	303MM	420MM	303MM	98MM
MAX HEIGHT	365MM	478MM	425MM	438MM	620MM	428MM	508MM
NET WEIGHT	3.6 KG	5.0 KG	5.0 KG	7.0 KG	24.0 KG	27.8 KG	43.1 KG
GROSS WEIGHT	4.3 KG	5.9 KG	5.5 KG	7.5 KG	25.5 KG	29 KG	45.6 KG

	TZ100002	TZ150001	TZ150002	TZ200011	TZ200012	TZ250001	TZ250002
	Ĭ	Ā	Å	1	Ţ	<b>X</b>	Å
MAX LOAD	10Т	I5T	15T	20Т	20Т	25T	25T
	615MM	445MM	645MM	410MM	665MM	415MM	680MM
MAX HEIGHT	1087MM	63IMM	1077MM	600MM	1090MM	539MM	968MM
NET WEIGHT	29.9 KG	23.5 KG	29.9 KG	26.1 KG	39.1 KG	24.4 KG	38.5 KG
GROSS WEIGHT	32.5 KG	25.5 KG	9 38 KG 9 9	28.I KG	41.7 KG	26.4 KG	41.1 KG



#### 2 TONNE JACK STAND SET

#### TH52011



#### SPECIFICATION

MAX. LOAD	2T
MIN. HEIGHT	265MM
MAX. HEIGHT	365MM
NET WEIGHT (PAIR)	3.6 KG
GROSS WEIGHT (PAIR)	4.3 KG
PRODUCT SIZE	215X192MM
PACKAGE SIZE	420X295X280MM (2 PAIRS)
20' CONTAINER	I350 PAIRS
BARCODE	5056485704419

#### **FEATURES**

- Locking pin is attached to the base with linking chain
- Multiple pin holes to allow adjustment to desired height
- Extra large feet area provide stability and resist sinking into asphalt
- Heavy duty stamped steel design provides stability and rigidity
- Sold and to be used only in pairs



#### MAX. HEIGHT 365mm MIN. HEIGHT 265mm

#### **3 TONNE JACK STAND SET**



TH53013

#### SPECIFICATION MAX. LOAD MIN. HEIGHT 310MM 478MM MAX. HEIGHT 5.0 KG NET WEIGHT (PAIR) GROSS WEIGHT (PAIR) 5.9 KG PRODUCT SIZE 262X225MM PACKAGE SIZE 675X485X315MM (2 PAIRS) 20' CONTAINER 890 PAIRS BARCODE 5056485704426

#### **FEATURES**

- Locking pin is attached to the base with linking chain
- Multiple pin holes to allow adjustment to desired height
- Extra large feet area provide stability and resist sinking into asphalt
- Heavy duty stamped steel design provides stability and rigidity
- Sold and to be used only in pairs





JCB

#### 2 TONNE JACK STAND SET

#### LARGE CONCAVE SADDLE SAFETY HANDLE WELDED STEEL BASE VIELDED STEEL VIELDE STEEL V

MAX. HEIGHT 425mm

MIN. HEIGHT

278mm

**3 TONNE JACK STAND SET** 

#### TH52002C



MAX. LOAD	2T.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0
MIN. HEIGHT	278MM
MAX. HEIGHT	425MM
NET WEIGHT (PAIR)	5.0 KG
GROSS WEIGHT (PAIR)	5.5 KG
PRODUCT SIZE	193X175MM
PACKAGE SIZE	210X195X345MM (2 PAIRS)
20' CONTAINER	2000 PAIRS
BARCODE	5056485704433

#### FEATURES

Locking pawl with built-in counter weight to secure ratchet bar at designated heights
Welded design for maximum strength & durability

Ratchet bar is constructed with ductile iron for increased strength and safety
 Safety pin double locking ratchet action

• Extra large feet area provide stability and resist sinking into asphalt

- Wide base for added stability
- Sold and to be used only in pairs





EXTRA SAFETY PIN DOUBLE LOCKINGING





#### SPECIFICATION MAX. LOAD 3T MIN. HEIGHT 303MM 438MM MAX. HEIGHT NET WEIGHT (PAIR) 7.0 KG **GROSS WEIGHT (PAIR)** 7.5 KG PRODUCT SIZE 207X188MM 220X205X355MM (2 PAIRS) PACKAGE SIZE 20' CONTAINER 1700 PAIRS BARCODE 5056485704440

#### FEATURES

• Locking pawl with built-in counter weight to secure ratchet bar at designated heights

• Welded design for maximum strength & durability

• Ratchet bar is constructed with ductile iron for increased strength and safety

Safety pin double locking ratchet action

Extra large feet area provide stability and resist sinking into asphalt
Wide base for added stability

Sold and to be used only in pairs



MAX. LOAD

PER PAIR



EXTRA SAFETY PIN DOUBLE LOCKINGING



RATCHET ACTION



TH56002A

#### **6 TONNE JACK STAND SET**

## LARGE CONCAVE RATCHET SADDLE BAR SAFETY HANDLE SAFETY PIN WELDED STEEL BASE 2X JACK STAND

## MAX. LOAD PER PAIR



#### **10 TONNE JACK STAND SET**



#### SPECIFICATION

MAX. LOAD	6T
MIN. HEIGHT	420MM
MAX. HEIGHT	620MM
NET WEIGHT (PAIR)	24.0 KG
GROSS WEIGHT (PAIR)	25.5 KG
PRODUCT SIZE	285X250MM
PACKAGE SIZE	315X275X470MM
20' CONTAINER	600 PAIRS
BARCODE	5056485704457

#### **FEATURES**

Locking pawl with built-in counter weight to secure ratchet bar at designated heights
Welded design for maximum strength & durability

• Ratchet bar is constructed with ductile iron for increased strength and safety

• Safety pin double locking ratchet action

• Extra large feet area provide stability and resist sinking into asphalt

• Wide base for added stability • Sold and to be used only in pairs



#### EXTRA SAFETY PIN DOUBLE LOCKINGING



#### **T410001**

2 PAIRS)

#### **FEATURES**

• Ratchet style allows for fine adjustment and fast removal.

• Solid steel handle, self-locking ratchet.

Large saddle,unitized frame construction.
Ductile iron rock.



EXTRA SAFETY PIN DOUBLE LOCKINGING









#### **10 TONNE HEAVY-DUTY JACK STAND**

# SADDLE LOCKING PIN CENTER COLUMN JCB WIDE BASE

#### **SPECIFICATION**

MAX. LOAD	ЮТ
MIN. HEIGHT	98MM
MAX. HEIGHT	508MM
NET WEIGHT	43.I KG
GROSS WEIGHT	45.6 KG
PRODUCT SIZE	726X342XI70MM
PACKAGE SIZE	790X400X200MM
20' CONTAINER	385 PIECE
BARCODE	5056485705171

#### **FEATURES**

Safety pin lockingWide base

- Extremely sturdy and solid construction



## MIN. HEIGHT 98mm

MAX. HEIGHT 508mm

#### **10 TONNE HEAVY-DUTY JACK STAND**

#### TZ100002

TZ100001



SPECIFICATION		
MAX. LOAD	ІОТ	
MIN. HEIGHT	615MM	
MAX. HEIGHT	1087MM	
NET WEIGHT	29.9 KG	
GROSS WEIGHT	32.5 KG	
PRODUCT SIZE	460X460X673MM	
PACKAGE SIZE	525X510X680MM	
20' CONTAINER	132 PIECE	
BARCODE	5056485705188	
XOXOXOXOXOXOXO	xoxoxoxoxoxoxoxoxoxox	

#### **FEATURES**

• Safety pin locking

Wide base
Extremely sturdy and solid construction









### 15 TONNE HEAVY-DUTY JACK STAND

### TZ150001



### SPECIFICATION

MAX. LOAD	IST
MIN. HEIGHT	445MM
MAX. HEIGHT	631MM
NET WEIGHT	23.5 KG
GROSS WEIGHT	25.5 KG
PRODUCT SIZE	330X330X463MM
PACKAGE SIZE	395X390X490MM
20' CONTAINER	280 PIECE
BARCODE	5056485705195

### **FEATURES**

Safety pin lockingWide base

- Extremely sturdy and solid construction



### **15 TONNE HEAVY-DUTY JACK STAND**

MAX. HEIGHT 63lmm

MIN. HEIGHT 445mm





### **SPECIFICATION**

MAX. LOAD	15Т СССССССССССССССССССССССССССССССССССС
MIN. HEIGHT	645MM
MAX. HEIGHT	1077MM
NET WEIGHT	29.9 KG
GROSS WEIGHT	38 KG
PRODUCT SIZE	460X460X663MM
PACKAGE SIZE	525X510X680MM
20' CONTAINER	132 PIECE
BARCODE	5056485705201

### **FEATURES**

• Safety pin locking

• Wide base

• Extremely sturdy and solid construction









### 20 TONNE HEAVY-DUTY JACK STAND

## SADDLE CENTER COLUMN WIDE BASE

### SPECIFICATION

MAX. LOAD	20T
MIN. HEIGHT	410MM
MAX. HEIGHT	600MM
NET WEIGHT	26.I KG
GROSS WEIGHT	28.1 KG
PRODUCT SIZE	330X330X428MM
PACKAGE SIZE	395X390X510MM
20' CONTAINER	280 PIECE
BARCODE	5056485705218

### FEATURES

• Wide base

• Extremely sturdy and solid construction



### 20 TONNE HEAVY-DUTY TALL JACK STAND

MAX. HEIGHT 600mm

MIN. HEIGHT

410mm

### TZ200012

TZ200011



SPECIFICATION	
MAX. LOAD	20T
MIN. HEIGHT	665MM
MAX. HEIGHT	1090MM
NET WEIGHT	39.1 KG
GROSS WEIGHT	41.7 KG
PRODUCT SIZE	460X460X683MM
PACKAGE SIZE	520X520X720MM
20' CONTAINER	132 PIECE
BARCODE	5056485705225

### FEATURES

Wide baseExtremely sturdy and solid construction









### **25 TONNE HEAVY-DUTY JACK STAND**

### TZ250001



### **SPECIFICATION**

MAX. LOAD	25T
MIN. HEIGHT	415MM
MAX. HEIGHT	539MM
NET WEIGHT	24.4 KG
GROSS WEIGHT	26.4 KG
PRODUCT SIZE	330X330X433MM
PACKAGE SIZE	395X390X455MM
20' CONTAINER	350 PIECE
BARCODE	5056485705232

### **FEATURES**

Safety pin locking
Wide base

- Extremely sturdy and solid construction



### **25 TONNE HEAVY-DUTY JACK STAND**

MAX. HEIGHT 539mm

MIN. HEIGHT 415mm

### TZ250002



### **SPECIFICATION** MAX. LOAD 25T 680MM MIN. HEIGHT MAX. HEIGHT 968MM 38.5 KG NET WEIGHT 41.1 KG **GROSS WEIGHT** PRODUCT SIZE 460X460X698MM PACKAGE SIZE 520X510X720MM 20' CONTAINER 132 PIECE BARCODE 5056485705249

### **FEATURES**

Safety pin lockingWide base

• Extremely sturdy and solid construction




MAX. HEIGHT 680mm MIN. HEIGHT 968mm







MAXIMIZE YOUR PRODUCTIVITY AND EFFICIENCY WITH JCB'S POSITIONING JACKS THAT DELIVER SMOOTH AND PRECISE MOVEMENT FOR PERFECT POSITIONING EVERY TIME.

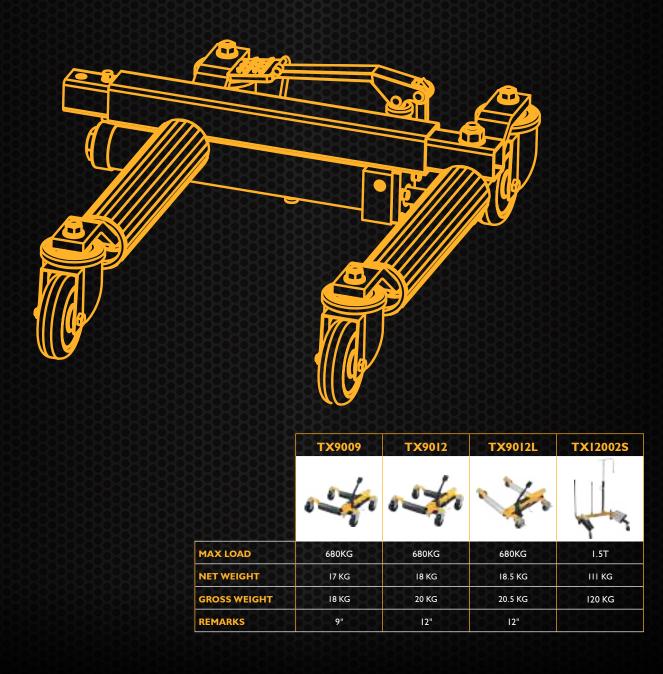



### **9" POSITIONING JACK**

### тхэооэ



### SPECIFICATION

MAX. LOAD	680KG
NET WEIGHT	17 KG
GROSS WEIGHT	18 KG
PACKAGE SIZE	570X570X180MM
20' CONTAINER	480 PIECE
BARCODE	5056485705256

### FEATURES

• Easy and compact foot pedal hydraulic lowering pump mechanism • 4 swivel wheels on the bottom that can rotate in all directions





### **12" POSITIONING JACK**

### TX9012



### SPECIFICATION

MAX. LOAD	680KG
NET WEIGHT	18 KG
GROSS WEIGHT	20 KG
PACKAGE SIZE	635X570X180MM
20' CONTAINER	430 PIECE
BARCODE	5056485705263

### FEATURES

• Easy and compact foot pedal hydraulic lowering pump mechanism • 4 swivel wheels on the bottom that can rotate in all directions








### **12" POSITIONING JACK WITH ALUMINIUM ROLLER**

### **TX9012L**

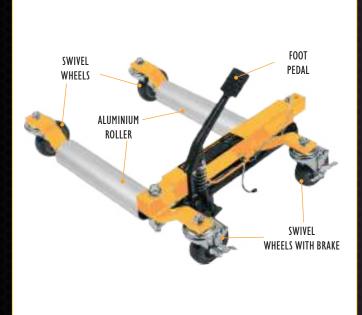

### **SPECIFICATION**

MAX. LOAD	680KG
NET WEIGHT	18.5 KG
GROSS WEIGHT	20.5 KG
PACKAGE SIZE	635X570X180MM
20' CONTAINER	430 PIECE
BARCODE	5056485705256

### FEATURES

• Easy and compact foot pedal hydraulic lowering pump mechanism

• 4 swivel wheels on the bottom that can rotate in all directions

• 2 wheels with brake • Aluminum roller

• High-class design, foldable for storage with specialized hanging brackets









TX12002S

### DUAL WHEEL DOLLY



### SPECIFICATION

<u>KOXOXOXOXOXOXOXO</u>	<u>xoxoxoxoxoxoxoxoxoxox</u>
MAX. LOAD	1.5T
MAX HEIGHT	750 MM
MIN/MAX OF THE MOUNTED WHEEL	DIAMETER 1000 – 1800 MM, WIDTH: 160 – 810 MM
NET WEIGHT	III KG
GROSS WEIGHT	120 KG
PACKAGE SIZE	PACKAGE SIZE:
BARCODE	5056485705287

### **FEATURES**

4 swivel wheels provide smooth maneuvering and positioning

• Adjustable support arm


 Pump lever • Roller table







DESIGNED FOR AUTO REPAIR PROFESSIONALS; COMBINING ROBUST POWER, PRECISION AND DURABILITY TO PERFORM BODY REPAIRS WITH UNPARALLELED EFFICIENCY AND EFFECTIVENESS FOR YEARS.

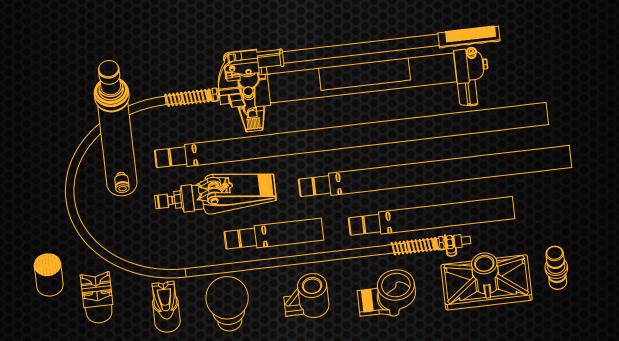

	T7040IS	T71002L
		11 Marine
MAX LOAD	41	10 T
	17.2 KG	27.5KG



### **4 TONNE PORTABLE BODY REPAIR KIT**



### SPECIFICATION

ITEM WEIGHT	17.2 KG	
PRODUCT DIMENSIONS	60.96 X 35.56 X 20.32 CM; 17.24 KG	
BARCODE	5056485705294	

### FEATURES

- Complete kit contains a variety of bodywork, frame repair and components for lifting, pushing, pulling, bending, smoothing and spreading
- Ideal for your workshop or garage and has a load Capacity of 4 Tonne; includes 20", 16", 9", 6" and 4" extension tubes with snap lock for quick, easy installation
- Features a serrated saddle, expansion wedge, rubber head, flat base, ram toe, Piston toe, wedge head, V-base, male connector and hydraulic hose
- The pump has an automatic overload system to prevent damage to edges and equipment, the flex head features a permanently moulded rubber pad, interlocking to prevent separation



## CASE INCLUDED

### **10 TONNE PORTABLE BODY REPAIR KIT**

### T71002L

### SPECIFICATION

<u>A A YAYAYAYAYAYAYA</u>	
MAX. LOAD	ІОТ
CYLINDER MIN HEIGHT	380MM
CYLINDER LIFTING HEIGHT	150MM
NET WEIGHT	27.5KG
GROSS WEIGHT	35.5KG
PACKAGE SIZE	960X450X210
BARCODE	5056485705300

### **FEATURES**

- Complete kit contains a variety of bodywork, frame repair and components for lifting, pushing, pulling, bending, smoothing and spreading
- Ideal for your workshop or garage and has a 10 ton load capacity; Includes 29-1/4", 20-1/4", 12/1/4", and 7-1/4" extension tubes with a snap-lock design for quick, easy assembly
- Features a serrated saddle, expansion wedge, rubber head, flat base, ram toe, Piston toe, wedge head, V-base, male connector and hydraulic hose
- The pump has an automatic overload system to prevent damage to edges and equipment, the flex head features a permanently moulded rubber pad, interlocking to prevent separation




CASE INCLUDED



# ENGNESTAND-GRANE

ENGINEERED WITH THE NEEDS OF PROFESSIONAL AUTO MECHANICS IN MIND, JCB'S ENGINE STANDS AND ENGINE CRANES DELIVER SUPERIOR STABILITY, EMBODYING COMMITMENT TO QUALITY, SAFETY AND DURABILITY ENSURING YOUR INVESTMENT STANDS THE TEST OF TIME

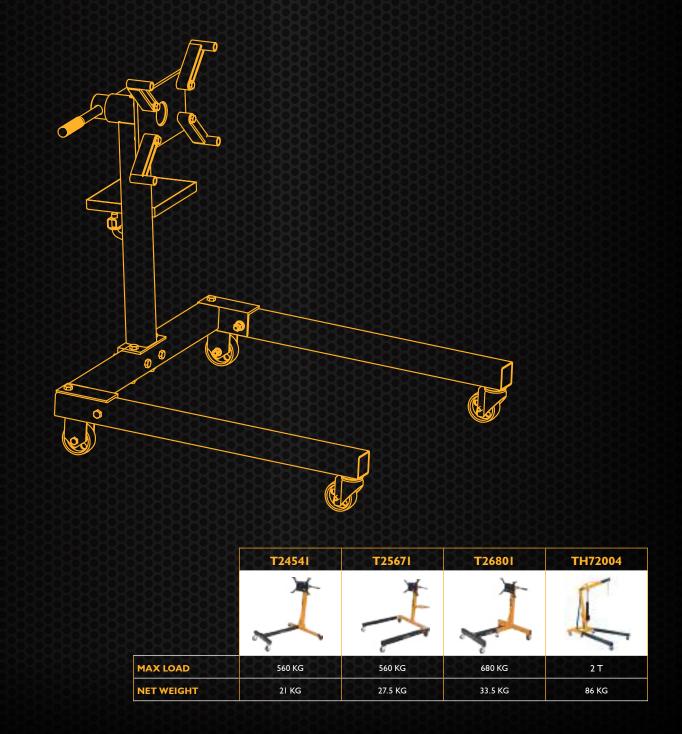



### 450 KG ENGINE STAND



### T24541

### SPECIFICATION

MAX. LOAD	560 KG
NET WEIGHT	21 KG
GROSS WEIGHT	22.3 KG
PRODUCT SIZE	995X780X850MM
PACKAGE SIZE	870X200X195MM
20' CONTAINER	740 PIECE
BARCODE	5056485705140

### **FEATURES**

• The wheels construction for more stability and esy rolling

•Adjustable mounting arms, accommodate a majority of engine blocks, both foreign and domestic

• Mounting plate rotates 360 degree and can be locked in 8 different positions

• Heavy gauge tubular steel construction • Roll-around engine stand assembles easily





### 560 KG ENGINE STAND



### T25671

### SPECIFICATION

MAX. LOAD	560 KG
NET WEIGHT	27.5 KG
GROSS WEIGHT	29.2 KG
PRODUCT SIZE	995X705X960MM
PACKAGE SIZE	880X215X220MM
20' CONTAINER	640 PIECE
BARCODE	5056485705157

### **FEATURES**

 The wheels construction for more stability and esy rolling
 Adjustable mounting arms, accommodate a majority of engine blocks, both foreign and domestic

Mounting plate rotates 360 degree and can be locked in 8 different positions
Heavy gauge tubular steel construction
Roll-around engine stand assembles easily







### 680 KG ENGINE STAND

### T26801



### SPECIFICATION

MAX. LOAD	680 KG
NET WEIGHT	33.5 KG
GROSS WEIGHT	35.3 KG
PRODUCT SIZE	870X820X860MM
PACKAGE SIZE	860X420X165MM
20' CONTAINER	448 PIECE
BARCODE	5056485705164

### **FEATURES**

• The wheels construction for more stability and esy rolling

•Adjustable mounting arms, accommodate a majority of engine blocks, both foreign and domestic

• Mounting plate rotates 360 degree and can be locked in 8 different positions

• Heavy gauge tubular steel construction

• Roll-around engine stand assembles easily





### **2 TONNE FOLDABLE CRANE**



### TH72004

### SPECIFICATION

NET WEIGHT	86 KG
GROSS WEIGHT	92 KG
20' CONTAINER	175 PIECE
BARCODE	5056485704464


### **FEATURES**

- Hydraulic long ram with built-in by-pass system prevents ram from being over-extended
- Heavy-gauge, welded construction with rugged square tubular steel
- Swivel castors for easy maneuvering and positioning
- Unique folding design for convenient storage



# INDRAUL G PRESSES

**JCB'S HYD** SHOP PRESSES RANGING FROM ß P KS, TO Rſ G CATER 1 100 SHOP DIY NOT ONLY WORK IS -**EFFICIENT BUT ALSO SAFE** 

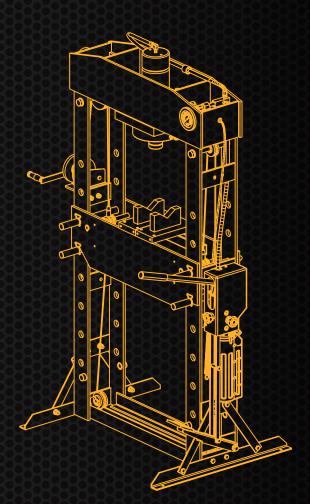

		TY12001	TY12002	TY20001	TY20002	TY20030
		İ	B	Ê	Ħ	B
	MAX LOAD	I2T	I2T	20T	20T	20T
	STROKE	165MM	165MM	175MM	175MM	175MM
	WORK RANGE	0-340MM	0-920MM	0-910MM	0-910MM	0-900MM
	TY30030	<b>TY50030</b>	TY30002	TY40001	O_TY5000I_O_	TY75021
	B	9	B	P	E	E
D	30T	50T	30T	40T	50T	75T
	I50MM	200MM	150MM	175MM	175MM	240MM
	0-940MM	0-920MM	0-970MM	0-1080MM	0-890MM	0-900MM



MAX STRO WOR

**TY12001** 

### **12 TONNE HYDRAULIC PRESS**

## PRESSURE GAUGE HYDRAULIC CYLINDER JCB RAM HAND-PRESSED WORK TABLE OIL PUMP

### **SPECIFICATION**

MAX. LOAD	12T
STROKE	165MM
WORK RANGE	0-340MM
NET WEIGHT	56.5 KG
GROSS WEIGHT	58.5 KG
PACKAGE SIZE	795X420X180MM
20' CONTAINER	287 PIECE
BARCODE	5056485705331

### **FEATURES**

Heavy-duty H-frame constructed of high-grade steel and built to exacting standards • for quality and durability

High quality large diameter hydraulic steel cylinder unit results in lower oil pressure needed to raise the load, helping to reduce wear and extend service life Hydraulics are powered with a high quality oil, which offers better corrosion

resistance and high/low temperature flexibility



### 0 WORKING RANGE / 0-340mm

### **12 TONNE HYDRAULIC PRESS**



### TY12002

SPECIFICATION	
MAX. LOAD	I2T
STROKE	165MM
WORK RANGE	0-920MM
NET WEIGHT	I- 54.5 KG / 2- 14 KG
GROSS WEIGHT	I- 56.5 KG / 2- I5 KG
PACKAGE SIZE	I- 1390X175X215MM / 2- 675X230X170MM
20' CONTAINER	234 PIECE
BARCODE	5056485705340

### **FEATURES**

Heavy-duty H-frame constructed of high-grade steel and built to exacting standards The avoid of the area constructed of high grade seen and built to exacting standards for quality large diameter hydraulic steel cylinder unit results in lower oil pressure needed to raise the load, helping to reduce wear and extend service life Hydraulics are powered with a high quality oil, which offers better corrosion resistance and high/low temperature flexibility







### **20 TONNE HYDRAULIC PRESS**



### **TY20001**


### SPECIFICATION

MAX. LOAD	20T
STROKE	175MM
WORK RANGE	0-910MM
NET WEIGHT	I- 60.8 KG / 2- 36 KG
GROSS WEIGHT	I- 6I.8 KG / 2- 37 KG
PACKAGE SIZE	I- 1565X185X145MM / 2- 795X330X150MM
20' CONTAINER	I70 PIEC
BARCODE	5056485705355

### **FEATURES**

- Heavy-duty H-frame constructed of high-grade steel and built to exacting standards for quality and durability
- High quality large diameter hydraulic steel cylinder unit results in lower oil pressure ring quality large clameter hydraulic steel cylinder unit results in lower oil pro-needed to raise the load, helping to reduce wear and extend service life Hydraulics are powered with a high quality oil, which offers better corrosion resistance and high/low temperature flexibility





### **20 TONNE HYDRAULIC PRESS**



### TY20002

SPECIFICATION		
MAX. LOAD	20T	
STROKE	175MM	
WORK RANGE	0-910MM	
NET WEIGHT	I- 60.8 KG / 2- 37.5 KG	
GROSS WEIGHT	I- 6I.8 KG / 2- 38.5 KG	
PACKAGE SIZE	I- 1565X185X145MM / 2- 795X330X150MM	
20' CONTAINER	I70 PIECE	
BARCODE	5056485705362	

### **FEATURES**

. Heavy-duty H-frame constructed of high-grade steel and built to exacting standards for quality and durability

- High quality large diameter hydraulic steel cylinder unit results in lower oil pressure needed to raise the load, helping to reduce wear and extend service life •
- Hydraulics are powered with a high quality oil, which offers better corrosion resistance and high/low temperature flexibility .







TY20030

### **20 TONNE HYDRAULIC PRESS**

## HYDRAULIC CYLINDER 🕇 JEB ( PRESSURE GAUGE RAM WORK TABLE FOOT PEDAL

### **SPECIFICATION**

MAX. LOAD	20T
STROKE	175MM
WORK RANGE	0-900MM
NET WEIGHT	106KG
GROSS WEIGHT	133KG
PACKAGE SIZE	1700X835X300MM
20' CONTAINER	42 PIECE
BARCODE	5056485705379

### **FEATURES**

- Heavy-duty H-frame constructed of high-grade steel and built to exacting standards
- for quality and durability High quality large dameter hydraulic steel cylinder unit results in lower oil pressure needed to raise the load, helping to reduce wear and extend service life Hydraulics are powered with a high quality oil, which offers better corrosion resistance and high/low temperature flexibility



### 0 WORKING RANGE / 0-900mm

### **30 TONNE HYDRAULIC PRESS**



### TY30030


SPECIFICATION		
MAX. LOAD	30T	
STROKE	150MM	
WORK RANGE	0-940MM	
NET WEIGHT	135KG	
GROSS WEIGHT	159KG	
PACKAGE SIZE	1700X835X300MM	
20' CONTAINER	42 PIECE	
BARCODE	5056485705386	

### **FEATURES**

Heavy-duty H-frame constructed of high-grade steel and built to exacting standards for quality and durability

- High quality large diameter hydraulic steel cylinder unit results in lower oil pressure
- needed to raise the load, helping to reduce wear and extend service life Hydraulics are powered with a high quality oil, which offers better corrosion resistance and high/low temperature flexibility







### **50 TONNE HYDRAULIC PRESS**



### **TY50030**

### SPECIFICATION

MAX. LOAD	50T
STROKE	200MM
WORK RANGE	0-920MM
NET WEIGHT	297KG
GROSS WEIGHT	345KG
PACKAGE SIZE	2008X1168X428MM
20' CONTAINER	20 PIECE
BARCODE	5056485705393

### **FEATURES**

Heavy-duty H-frame constructed of high-grade steel and built to exacting standards for quality and durability High quality large diameter hydraulic steel cylinder unit results in lower oil pressure

needed to raise the load, helping to reduce wear and extend service life Hydraulics are powered with a high quality oil, which offers better corrosion resistance and high/low temperature flexibility





### **30 TONNE HYDRAULIC PRESS**



### TY30002

SPECIFICATION	
MAX. LOAD	30T
STROKE	I50MM
WORK RANGE	0-970MM
NET WEIGHT	152 KG
GROSS WEIGHT	165 KG
PACKAGE SIZE	1640X380X310MM
20' CONTAINER	I00 PIECE
BARCODE	5056485705409

### **FEATURES**

Heavy-duty H-frame constructed of high-grade steel and built to exacting standards Heavy-duty H-frame constructed of high-grade steer and built to exacting standards for quality and durability High quality large diameter hydraulic steel cylinder unit results in lower oil pressure needed to raise the load, helping to reduce wear and extend service life Hydraulics are powered with a high quality oil, which offers better corrosion resistance and high/low temperature flexibility







**TY40001** 

### **40 TONNE HYDRAULIC PRESS**



### **SPECIFICATION**

MAX. LOAD	40T	
STROKE	175MM	
WORK RANGE	0-1080MM	
NET WEIGHT	225KG	Ŕ
GROSS WEIGHT	247KG	
PACKAGE SIZE	2010X550X330MM	8
20' CONTAINER	60 PIECE	
BARCODE	5056485705416	

### **FEATURES**

Heavy-duty H-frame constructed of high-grade steel and built to exacting standards

for quality and durability High quality large dameter hydraulic steel cylinder unit results in lower oil pressure needed to raise the load, helping to reduce wear and extend service life Hydraulics are powered with a high quality oil, which offers better corrosion resistance and high/low temperature flexibility





### **50 TONNE HYDRAULIC PRESS**



### **TY50001**

SPECIFICATION	
MAX. LOAD	50T
STROKE	175MM
WORK RANGE	0-890MM
NET WEIGHT	256KG
GROSS WEIGHT	286KG
PACKAGE SIZE	920X380X1792MM
20' CONTAINER	36 PIECE
BARCODE	5056485705423

### **FEATURES**

Heavy-duty H-frame constructed of high-grade steel and built to exacting standards for quality and durability

- High quality and durability High quality large diameter hydraulic steel cylinder unit results in lower oil pressure needed to raise the load, helping to reduce wear and extend service life Hydraulics are powered with a high quality oil, which offers better corrosion resistance and high/low temperature flexibility







### **75 TONNE HYDRAULIC PRESS**

## HAND & AIR PRESSURE GAUGE PRESSED PUMP PROTECTOR NETTING Reduce WIRE WINCH C C 0 . FOOT PEDAL



MAX. LOAD	75T
STROKE	240MM
WORK RANGE	0-900MM
NET WEIGHT	457KG
GROSS WEIGHT	530KG
PACKAGE SIZE	1370X840X2124MM
20' CONTAINER	I0 PIECE
BARCODE	5056485705430

TY75021

### **FEATURES**

- .
- Heavy-duty H-frame constructed of high-grade steel and built to exacting standards for quality and durability High quality large diameter hydraulic steel cylinder unit results in lower oil pressure needed to raise the load, helping to reduce wear and extend service life
- Hydraulics are powered with a high quality oil, which offers better corrosion resistance and high/low temperature flexibility .



WORKING RANGE 0-900mm 0



# 

5

**UNLEASH THE POWER OF AIR WITH JCB'S PNEUMATIC** FACH TOOL PNFIIMATIC 200 UID NR 5 ARITY. IR TOOLS. MUUKI **YOU'RE** DRIVE PRODUCTIVITY TO 100 C **VESSING ITS POWER** NEW HEIGHTS.

**SICIS** 





	RP9515 / RP9515KIT	RP9510 / RP9510 KIT	RP7460	RP7463	RP7495	BL-1050
	7	*		49	<u></u>	- <b>91-4</b> 2
SQUARE DRIVE	1/2"	l/2"	3/4"			
NO LOAD SPEED	8500 RPM	7000 RPM	7000 RPM	6000 RPM	2800RPM	2600RPM
MAX. FORWARD TORQUE	610 NM	1450 NM	1800 NM	2000 NM		4000 NM
MAX LOOSENING TORQUE:	1200 NM	1600 NM	2000 NM			
AIR INLET SIZE	1/4"	I/4"	3/8"	1/2"	I/2"	1/2"
NET WEIGHT	1.2 KG	2 KG	3 KG	7.8 KG	18.9 KG	21 KG

	RP7408	RP7412	RP7414	RP7810 (RP7102)	RP7314
			Carlo Carlo		-
SQUARE DRIVE	1/2"	3/8"	I/4"		l/4"
NO LOAD SPEED	I60 RPM	I60 RPM	240 RPM	1800 RPM	25000 RPM
MAX. FORWARD TORQUE	68 NM	68 NM	36 NM		
AIR INLET SIZE	1/4"	I/4" • • •	1/4"	el/4"	cl/4"
NET WEIGHT	I.2 KG	I.I KG	1.1 KG	1.1 KG	1.2 KG

	RP8037-2	"R876I (RP8033-I)	RP8033-1	RP8037-2
	<b>P</b>	T		
MAX. OPERATING PRESSURE	0-8.8 BAR	6,2 BAR (90 PSI)	6,2 BAR (90 PSI)	0-8.8 BAR
LENGHT OF AIR HOSE (OR NOZZLE)	350 MM	150 MM	150 MM	350 MM
AIR INLET SIZE	1/4"	I/4"	I/4"	I/4"
	0.40 KG			

	A612	H827	1020	R8826	RP8048
	1	34	*	77 4	
PRODUCT NAME	AIR TYRE INFLATOR GUN	AIR SPRAY GUN	AIR SPRAY GUN	AIR SPRAY GUN KIT	AIR SAND BLASTER GUN KIT



### 1/2" AIR IMPACT WRENCH

### **RP9515**



### 1/2" AIR IMPACT WRENCH WITH SOCKET SET

### RP9515KIT



/4"

AIR INI FT SIZE

### SPECIFICATION

1/2"
8500 RPM
610 NM
1200 NM
1/4"
8MM (3/8")
170 L/MIN
1.2 KG
5056485704334

Hard Case, 10x Impact Sockets (9,10,11,13,14,17,19,22,24,27mm), 5" Extention Bar, Oil Pot, Hex Wrench, Mini Oiler

### **FEATURES**

6.3 Bar

(90Psi)

MAX. WORKING PRESSURE

(3)

½" Square ultrahigh alloy steel, provide superior resistance to impact and abrasion
 Orbital tigger design easier to use

Direction Switch

• Improved air inlet effectively to reduce the tapped damage when maintenance

610Nm MAX. TORQUE

ACCESSORIES INCLUDED



1/2"

SOUARE DRIVE

### 1/2" AIR IMPACT WRENCH

## TWIN HAMMER MECHANISM SOUARE DRIVE HEAD I/2" JCB DIRECTION TRIGER SWITCH **AIR INLET**

### SPECIFICATION

SQUARE DRIVE	1/2"
NO LOAD SPEED	7000 RPM
MAX. FORWARD TORQUE	1450 NM
MAX LOOSENING TORQUE:	1600 NM
AIR INLET SIZE	1/4"
AIR HOSE (ID)	8MM (3/8")
AVG AIR CONSUMPTION:	198 L/MIN
NET WEIGHT	2 KG
BARCODE	5056485704143

### **FEATURES**

+  $^{\prime\prime}\!\!\!/^{\prime\prime}$  Square ultrahigh alloy steel, provide superior resistance to impact and abrasion Orbital tigger design easier to use

Direction Switch

Improved air inlet effectively to reduce the tapped damage when maintenance
 Twin hammer mechanism





6.3 Bar 3 (90Psi) MAX. WORKING PRESSURE

1450Nm MAX. TORQUE



### ACCESSORIES INCLUDED

**RP9510** 

### 1/2" AIR IMPACT WRENCH KIT





/4"

SQUARE DRIVE	1/2"
NO LOAD SPEED	7000 RPM
MAX. FORWARD TORQUE	1450 NM
MAX LOOSENING TORQUE:	1600 NM
AIR INLET SIZE	I/4"
AIR HOSE (ID)	10MM (3/8")
AVG AIR CONSUMPTION:	198 L/MIN
NET WEIGHT	2 KG
BARCODE	5056485704167

### Hard Case, 3x 1/2" Impact Sockets (17mm, 19mm, 21mm), Oil Bottle **FEATURES**

・ ½" Square ultrahigh alloy steel, provide superior resistance to impact and abrasion • Orbital tigger design easier to use

Direction Switch

• Improved air inlet effectively to reduce the tapped damage when maintenance

• Twin hammer mechanism

MAX. TORQUE

1/2" SQUARE DRIVE





(90Psi) MAX. WORKING PRESSURE

**TWIN HAMMER** 1450Nm MECHANISM



### 3/4" AIR IMPACT WRENCH

### **RP7460**



### SPECIFICATION

SQUARE DRIVE	3/4"
NO LOAD SPEED	7000 RPM
MAX. FORWARD TORQUE	1800 NM
MAX LOOSENING TORQUE:	2000 NM
AIR INLET SIZE	3/8"
AIR HOSE (ID)	8MM (3/8")
AVG AIR CONSUMPTION:	230 L/MIN
NET WEIGHT	3 KG
BARCODE	5056485704150

### **FEATURES**

• 3/4' Square ultrahigh alloy steel, provide superior resistance to impact and abrasion • Orbital tigger design easier to use

Direction Switch

• Improved air inlet effectively to reduce the tapped damage when maintenance • Twin hammer mechanism

3/4"



### MAX. WORKING PRESSURE

6.3 Bar

(90Psi)

 $(\mathbf{S})$ 

### 1800Nm MAX. TORQUE

**TWIN HAMMER** MECHANISM

### ACCESSORIES INCLUDED

SQUARE DRIVE



### **1" AIR IMPACT WRENCH**





SPECIFICATION		
SQUARE DRIVE		
AIR CONSUMPTION	320 L/MIN	
NO LOAD SPEED	6000 RPM	
MAX. TORQUE	2000 NM	
AIR INLET SIZE	I/2"	
AIR HOSE (ID)	16MM (5/8")	
LENGHT	340 MM	
OPERATING PRESSURE	90 PSI (6.3 BAR)	
NET WEIGHT	7.8 KG	
BARCODE	5056485704266	

### **FEATURES**

I" Square ultrahigh alloy steel, provide superior resistance to impact and abrasion
Provide 4 kinds of speed with forward and reverse

• Ergonomic handle to comfort and control

• Improved air inlet effectively to reduce the tapped damage when maintenance

• Trigger design easier to use

SQUARE DRIVE



6.3 Bar 0 (90Psi) MAX. WORKING PRESSURE

2000Nm MAX. TORQUE



### **1" AIR IMPACT WRENCH**

### RP7495



SPECIFICATION	
SQUARE DRIVE	
CAPACITY BOLD SIZE	2" (50MM)
NO LOAD SPEED	2800RPM
WORKING TORQUE	3480 NM
OVERALL LENGHT	644 MM
AIR INLET SIZE	I/2"
AIR HOSE (ID)	I6MM (5/8")
AVG AIR CONSUMPTION:	340 L/MIN
SUG. AIR COMP	5 HP
NET WEIGHT	18.9 KG
BARCODE	5056485704174

SQUARE DRIVE







### WORKING TORQUE

### ACCESSORIES INCLUDED

**1" AIR IMPACT WRENCH** 





SPECIFICATION		
SQUARE DRIVE	I" O O O O O O O O O O O O O O O O O O O	
CAPACITY BOLD SIZE	2" (50MM)	
NO LOAD SPEED	2600RPM	
WORKING TORQUE	4000 NM	
OVERALL LENGHT	644 MM	
AIR INLET SIZE	I/2"	
AIR HOSE (ID)	I6MM (5/8")	
AVG AIR CONSUMPTION:	480 L/MIN	
SUG. AIR COMP	5 HP	
NET WEIGHT	21 KG	
BARCODE	5056485705454	



AIR INLET SIZE



4000Nm WORKING TORQUE



### 1/2" AIR RATCHET WRENCH

### **RP7408**



### 3/8" AIR RATCHET WRENCH

D	27	4	19
	- /		



### SPECIFICATION SQUARE DRIVE 3/8" CAPACITY BOLD SIZE NO LOAD SPEED 160 RPM WORKING TORQUE 68 NM OVERALL LENGHT 254 MM **AIR INLET SIZE** 1/4" AIR HOSE (ID) 10MM (3/8") AVG AIR CONSUMPTION: 77 L/MIN (2.7 CFM) SUG. AIR COMP I HP I.I KG NET WEIGHT 5056485704242 BARCODE

3/8"



6.3 Bar (90Psi) MAX. WORKING PRESSURE 68Nm



### 1/4" AIR RATCHET WRENCH

### **RP7414**



### AIR DRILL KIT





SPECIFICATION	
NO LOAD SPEED	1800 RPM
СНИСК	10 MM KEYLESS
AIR INLET SIZE	1/4"
AIR HOSE (ID)	10MM (3/8")
AVG AIR CONSUMPTION:	105 L/MIN (3.7 CFM)
NET WEIGHT	1.1 KG
BARCODE	5056485704273

7x Screwdriver Bit Set, 3/8" (8mm) Air Hose Connector, Oil Bottle

KEYLESS CHUCK



6.3 Bar (90Psi) MAX. WORKING PRESSURE



**RP7314** 

### 1/4" AIR DIE GRINDER

SAFETY LOCK TRIGGER

Bee

### SPECIFICATION

KOKOKOKOKOKOKO	
COLLECT CONNECTOR	I/4" (6 MM)
NO LOAD SPEED	25000 RPM
AIR INLET SIZE	1/4"
AIR HOSE (ID)	10MM (3/8")
AVG AIR CONSUMPTION:	128.3 L/MIN (4.5 CFM)
NET WEIGHT	1.2 KG
BARCODE	5056485704259

2x Wrenches (14mm and 19mm), 1/8" (3mm) Collet, 1/4" (6.3mm) Air Hose Connector



I/4" (6 MM) COLLECT



1/4"

**AIR INLET SIZE** 

AIR INLET



### ACCESSORIES INCLUDED

A612

**AIR TIRE INFLATOR GUN** 



### SPECIFICATION

GAUGE CALIBRATED	0-203 PSI (0 TO 14 BAR)
READOUT RESOLUTION	0.1 PS
TEMPERATURE RANGE	-18°C TO 40°C
AIRINLET	1/4"
UNUT OF MEASURE	PSI, BAR, KPA, KG/CM <sup>2</sup>
ACCURACY	±1%
BATTERY REQUIREMENTS	2X AAA INCLUDED
EASY TO READ GAUGE	2.5"
BARCODE	5056485704181
	DX0X0X0X0X0X0X0X0X0X0X0X

2x AAA Batery, Dual Head Nozzle Adapter


3 FUNCTIONS INFLATION | DEFLATION | MEASUREMENT ACCESSORIES INCLUDED



2.5" LCD DISPLAY

### AIR INFLATOR TYRE PRESSURE GUN

### RP8037-2

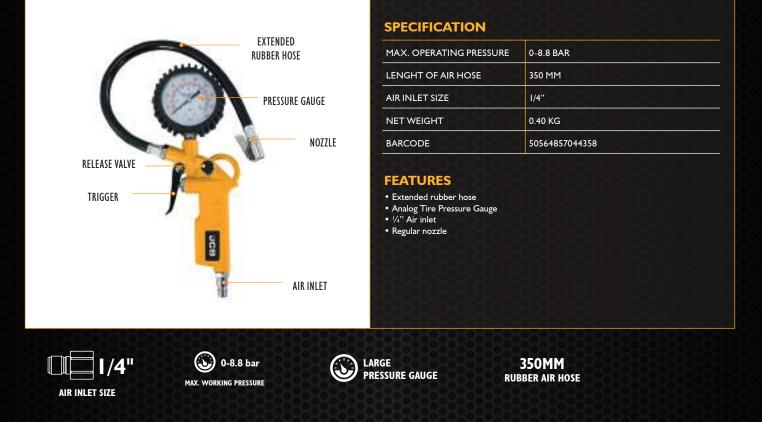

### AIR BLOW GUN KIT



### SPECIFICATION

MAX. WORKING PRESSURE	6,2 BAR (90 PSI)
LENGHT	150 MM
AIR INLET SIZE	I/4"
NOZZLE	2,5 MM
BARCODE	50564857044129

I x I/4" Female Connector, Ix2.5 cm Short Nozzle, Ix15 cm Long Nozzle





### ACCESSORIES INCLUDED

R8761 (RP8033-1



### 6 PIECE AIR TOOL KIT

### **R8031K6** (RP8037-2, RP8033-1)



LARGE

PRESSURE GAUGE

 $(\mathbf{U})$ 

### SPECIFICATION for RP8033-1

MAX. WORKING PRESSURE	6,2 BAR (90 PSI)	
LENGHT	150 MM	
AIR INLET SIZE	1/4"	
NOZZLE	2,5 MM	
SPECIFICATION for RP8037-2		
MAX. OPERATING PRESSURE	0-8.8 BAR	
LENGHT OF AIR HOSE	350 MM	
AIR INLET SIZE	1/4"	
BARCODE	5056485704341	

5m Air Hose with quick connection, 3x air Needles

ACCESSORIES INCLUDED

AIR INLET SIZE

### AIR SPRAY GUN

/4"





### SPECIFICATION

NOZZLE	ØI.4 MM
RECOMMENDED AIR PRESSURE	2.0-3.5 BAR
SPRAYING WIDTH	180-250 MM
PAINT CONTAINER	600 ML
AIR CONSUMPTION	240-300 L/MIN
AIR INLET	1/4"
BARCODE	5056485704198

### **FEATURES**

Stainless nozzle and needle
Suitable for water based paint

600ml paint containerControl knobs for fluid, pattern and air volume





WORKING PRESSURE





### **AIR SPRAY GUN**



### SPECIFICATION

NOZZLE	ØI.4 MM
RECOMMENDED AIR PRESSURE	2.0-3.5 BAR
SPRAYING WIDTH	180-250 MM
PAINT CONTAINER	600 ML
AIR CONSUMPTION	120-200 L/MIN
AIR INLET	1/4"
BARCODE	5056485704204

### **FEATURES**

Stainless nozzle and needleSuitable for water based paint

- 600ml paint container
  Control knobs for fluid, pattern and air volume

**SPECIFICATION** for H827





### **3 PIECE AIR SPRAY GUN KIT**



1020



### NOZZLE ØI.4 MM RECOMMENDED AIR PRESSURE 2.0-3.5 BAR SPRAYING WIDTH 180-250 MM PAINT CONTAINER 600 ML AIR CONSUMPTION 240-300 L/MIN **SPECIFICATION** for H2000 NOZZLE ØI.0 MM RECOMMENDED AIR PRESSURE 3.0-4.0 BAR SPRAYING WIDTH 110-160 MM PAINT CONTAINER 110-160 L/MIN AIR CONSUMPTION 125 ML BARCODE 5056485704211

**AIR INLET SIZE** 

1/4"





### AIR SAND BLASTER GUN KIT

### **RP8048**



### SPECIFICATION

HOPPER CAPACITY	1000 ML
AIR CONSUMPTION	I70 L/MIN
WORKING PRESSURE	6-8 BAR
AIR INLET	1/4"
BARCODE	5056485704136

4x Nozzles (Surface nozzle, point nozzle, outer edge nozzle, inner edge nozzle), Blasting agent, Collecting bag







### ACCESSORIES INCLUDED

WORKING PRESSURE



# LISER ELEVELERS.

**DISTANCE METERS AND** REFORE WITH niscavfr ACCURACY **LIKE NEVER** JCB'S LASER ELIVER P **TOOL FOR** UR RED LWAYS ISV-TO-USE FIN R E ALIGNED. 





### **30M LASER DISTANCE MEASURE**

### JCB-LDM-30



### SPECIFICATION

MEASURING DISTANCE	0.05-30M
ACCURACY	±3MM
BARCODE	5056485704730

2XAAA RAYMAX ALKALINE BATTERIES INCLUDED. DISTANCE RANGE – MEASURES UP TO 30M/100FT. AUTOMATIC AREA AND VOLUME CALCULATIONS

### **FEATURES**

- Multi function measure distance, area, volume, pythagoras(2-Point/3-Point) measure, continuous measurement, addition and subtraction, reference change the reference, unit setting
- Inverted backlit LCD display improves readability
- Ergonomic soft grip prevents tool from easy drop, bump







₩1.1 FRONT / BACK



### JCB-LDM-65

### 65M LASER DISTANCE MEASURE



### SPECIFICATION

MEASURING DISTANCE	0.05-65M
ACCURACY	±3MM
BARCODE	5056485704747

2XAAA RAYMAX ALKALINE BATTERIES INCLUDED DISTANCE RANGE – MEASURES UP TO 65M.

### **FEATURES**

• Multi function measure: single and continuous distance measure, area,

- volume, pythagoras (2-Point/3-Point) measure, min &max, addition and
- subtraction, reference change, unit setting.
- Back-lit LCD display improves readability.
- Three reference change, 30 measurement storage capability and beeper
- Functions make your measurements more convenient and efficient.
- Built-in bubble vial enables a visual reference for horizontal alignment.









±3mm

✿









### **80M RECHARGEABLE LASER DISTANCE MEASURE**

JCB-LDM-65



### **SPECIFICATION**

MEASURING DISTANCE	0.05-80M
ACCURACY	±3MM
BARCODE	5056485704754

RECHARGABLE LI-ION BATTERY WITH USB-C CHARGING DISTANCE RANGE - MEASURES UP TO 80M.

### **FEATURES**

- Multi function measure: distance, area, volume, Pythagoras (2-Point/3-Point) measure, continuous measurement, min &max, addition and subtraction, reference change, unit
- setting.
  30 data stored memory and beeper functions make your measurement more convenient and efficient.
  Built-in bubble vial enables a visual reference for horizontal alignment.
  Three reference changes make it easy for you to take measurements in different
- scenarios.
- In accordance with IEC60825-1















RECHARGEABLE



### **GREEN BEAM SELF-LEVELING CROSS LINE LASER LEVEL**

### JCB-CCL-G



### SPECIFICATION

MEASURING DISTANCE	20M
ACCURACY	±8MM@10M
LEVELING RANGE	±4 DEGREE
BARCODE	5056485704778

0.65M THREE-LEGGED SUPPORT INCLUDED 2XAA RAYMAX ALKALINE BATTERIES INCLUDED

### **FEATURES**

- Self Leveling: projects two bright lines (horizontal & vertical ) onto flat surfaces and levels in few seconds.
- One-button operation: easily switch the laser lines and turn it on and off.
- Can be wall or tripod mounted for quick and easy setup with M6 screw.
- Smart Pendulum System Self-levels and indicates outof-level condition; locks when switched off
- Manual Mode Locks lines for use at any angle







SELF-LEVELING

INCLUDED

A A

**x**2



JCB-CCL-R

### RED BEAM SELF-LEVELING CROSS LINE LASER LEVEL



### SPECIFICATION

MEASURING DISTANCE	0.05-80M
ACCURACY	±3MM
LEVELING RANGE	±4 DEGREE
BARCODE	5056485704761

0.65M THREE-LEGGED SUPPORT INCLUDED 2XAA RAYMAX ALKALINE BATTERIES INCLUDED

### FEATURES

- Self Leveling: projects two bright lines (horizontal & vertical ) onto flat surfaces and levels in few seconds.
- . One-button operation: easily switch the laser lines and turn it on and off.
- Can be wall or tripod mounted for quick and easy setup with M6 screw.
- Smart Pendulum System Self-levels and indicates outof-level condition; locks when
- switched off • Manual Mode — Locks lines for use at any angle
- In accordance with IEC60825-1









SELF-LEVELING


đ٥

INCLUDED



# SOCKETS

EACH JCB SOCKET SET IS METICULOUSLY DESIGNED TO CATER TO A WIDE RANGE **OF HIGH-OUALITY** 1 PPHICATIN NFFFRING COMPREHENSI SELECTIO SI ATERIALS. (FTS F 3 CONDITIONS 51 P IN HEST MORKING 100 **DELIVER OUTSTANDING PERFORMANCE OVER TIME.** AND

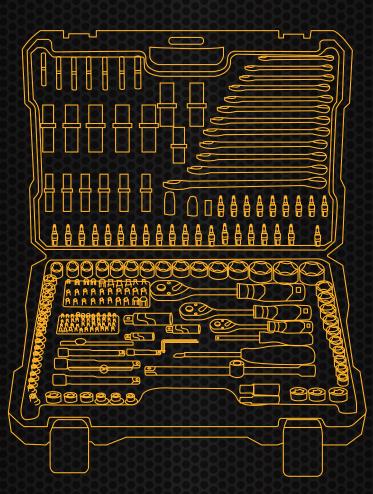


	JCB-38841	JCB-41082-5	JCB-4941-5	JCB-4821-5
	R.			
PIECE	216	108	94	82
DRIVE	1/4"&3/8"&1/2	1/4"&1/2	I/4"&I/2"	I/4"&I/2"



**JCB-38841** 

### 216 PIECE SOCKET AND BIT SET



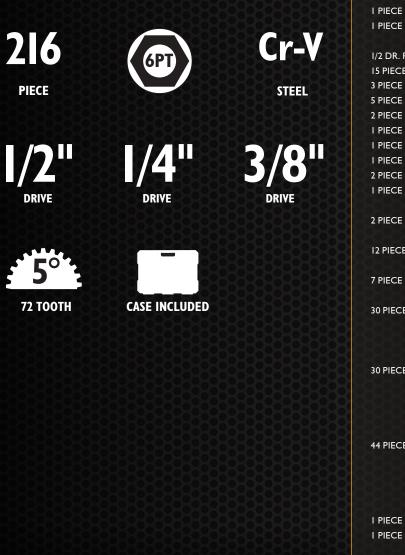

### SPECIFICATION

BARCODE		5056485704082			
I/4" DR. PART:					
13 PIECE	SOCKET: 4, 4.5, 5, 5.5, 6,7, 8, 9, 10, 11, 12, 13, 14 MM				
5 PIECE	TORX SOCKET: E4, E5, E6, E7, E8 MM				
7 PIECE	DEEP SOCKET: 4,5, 6,7,	8,9,10MM			
I PIECE	SLIDING T BAR				
2 PIECE	EXTENSION BAR: 2",4				
I PIECE	BIT HOLDER				
I PIECE	UNIVERSAL JOINT				
I PIECE	SPINNER HANDLE 6"				
I PIECE	QUICK RATCHET HAN	IDLE			
3/8" DR. P/	ART:				
10 PIECE	SOCKET: 10, 11, 12, 13,	14, 15, 16, 17, 18, 19 MM			
6 PIECE	TORX SOCKET: EI0, EI	I, EI2, EI4, EI6, EI8			
6 PIECE	DEEP SOCKET: 10, 11, 1	2, 13, 14, 15MM			
I PIECE	SPARK PLUG SOCKET	18MM			
I PIECE	BIT HOLDER				
I PIECE	UNIVERSAL JOINT				
I PIECE	EXTENSION BAR 5"				
I PIECE	QUICK RATCHET HAN	IDLE			
I/2 DR. PA	RT:				
15 PIECE	SOCKET: 10, 11, 12, 13,	14, 15, 17, 19, 20, 21, 22, 24, 27, 30, 32MM			
3 PIECE	TORX SOCKET: E20, E2	22, E24			
5 PIECE	DEEP SOCKET: 16, 17, 1	8, 19, 22MM			
2 PIECE	EXTENSION BAR: 5" IC				
I PIECE	3-WAY ADAPTER				
I PIECE	UNIVERSAL JOINT				
I PIECE	BIT HOLDER				
2 PIECE	SPARK PLUG SOCKET:	16, 21MM			
I PIECE	QUICK RATCHET HAN	IDLE			
2 PIECE	BIT SOCKET: T55, T60				
12 PIECE -	12 PIECE -SPANNER: 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22MM				
7 PIECE -HEX KEY WRENCH: 1.27, 1.5, 2, 2.5, 3, 4, 5MM					
30 PIECE	BIT SOCKET:				
	PH: 3,4; PZ: 3, 4; FD: 6,	6 5 7 8MM			
		1; TORX: 25, 27, 30, 35, 40, 40, 45, 50			
	TT: 27, 30, 35, 40, 45, 50				
30 PIECE -					
	HEX: 5.5, 6, 6.5, 7, 8MM	1; SL: 6, 6.5, 8MM; PH: 3,4; PZ: 3,4			
	TORX: 25, 27, 30, 35, 40	0, 40, 45, 50; TT: 27, 30, 35, 40, 45, 50			
	M: 5, 6, 8, 10				
44 PIECE -	BIT:				
02020		2; PZ, I; TORX: 8, 10, 15, 20, 25			
		20, 25, 25, 40; HEX: 3,4,5,6			
		; M: 5,6, 8; S: 1,2; Y: 1,2,3; TORQ: 6, 8, 10			
	SPANNER: 4, 6, 8				
I PIECE	SCREWDRIVER				
I PIECE	BLOW CASE WITH LOO	GO + COLOUR SLEEVE			



### JCB-41082-5

, 19, 20, 21, 24, 27, 30, 32 MM

	DECECTOR		
	SPECIF	ICATION	
	BARCODE		5056485704112
1.0 0 0 0	I/4" DR PAI	RT-	
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			i, 5.5, 6,7, 8, 9, 10, 11, 12, 13, 14 MM
A R A B B F F F F F	8 PIECE	DEEP SOCKET: 6	, 7, 8, 9, 10, 11, 12, 13MM
	5 PIECE	TORX SOCKET:	E4, E5, E6, E7, E8 MM
1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-	2 PIECE	EXTENSION BAR	R: 2" ,4"
AND ADDRESS AND ADDRESS AND		UNIVERSAL JOIN	
	I PIECE	QICK RATCHET	HANDLE
@@@@@@@@@@@@@		SLIDING T BAR	
8	I PIECE	SPINNER HANDI	LE 6"
8 8 8	I/2" DR. PA	APT.	
S			2, 13, 14, 15, 16, 17, 18, 19, 20, 21, 24,
3 · · · · · · · · · · · · · · · ·	5 PIECE		14, 15, 17, 19, 22 MM
Cereson Cereson		SPARK PLUG SOC	
	8 PIECE	TORX SOCKET:	10, 11,12, 14, 16, 18, 20, 24 MM
	2 PIECE	EXTENSION BAR	R: 5" 10"
		UNIVERSAL JOIN	NT COCCOCCOCCOCCOCC
	I PIECE	QICK RATCHET	HANDLE
		BIT ADAPTOR	
	I PIECE	3-WAY ADAPTOR	
Cr-V		BIT SOCKET	
6PT		SL: 4, 5.5, 6.5MM	
		PH: I, 2	
STEEL		PZ: 1, 2	
		HEX: 3, 4, 5, 6MM	100000000000000000000000000000000000000
		TORX: 8, 10, 15, 2	20, 25, 27, 30
	I7 PIECE B		
	IT FIECE B	SL: 8, 10, 12MM	
		PH: 3,4	
DRIVE 72 TOOTH		PZ: 3, 4	
		HEX: 7,8, 10, 12,	I4MM
		TORX: 40, 45, 50	, 55, 60
	3 PIECE -H	EX KEY WRENCH	I: 1.5, 2, 2.5MM
	I PIECE	BLOW CASE WIT	H LOGO + COLOUR SLEEVE



JCB-4941-5

### 94 PIECE SOCKET AND BIT SET



94

PIECE

I/2"





6P1



Cr-V

STEEL

72 TOOTH



### SPECIFICATION

BARCOD	EXOXOXOXOXO 5	056485704105
1/4" DR PA		Roedeeleeseeseese
13 PIECE	SOCKET 4,4.5, 5, 5.5, 6,7,	
8 PIECE	DEEP SOCKET: 6, 7, 8, 9,	10, 11, 12, 13MM
I PIECE	ADAPTOR	
	UNIVERSAL JOINT	
	QICK RATCHET HANDL	
I PIECE	DR SPINNER HANDLE 6"	
I PIECE	FLEXIBLE EXTENSION 2	", 4"
I PIECE	SLIDING T BAR	
1/2" DR. P.	ART:	
18 PIECE 32MM	SOCKET 10, 11,12, 13, 14,	15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30,
4 PIECE	DEEP SOCKET 14, 15, 17,	19MM
2 PIECE	SPARK PLUG SOCKET 16	, 2IMM
I PIECE	BIT ADAPTOR	
2 PIECE	EXTENSION BAR 5" 10"	
I PIECE	UNIVERSAL JOINT	
I PIECE	QICK RATCHET HANDL	
I PIECE	3-WAY ADAPTOR	
17 PIECE		
	SL: 4, 5.5, 7MM	
	PH: 1, 2	
	PZ: 1, 2	
	HEX: 3, 4,5, 6MM	
	TORX: 8, 10, 15, 20, 25, 3	b
15 PIECE	BIT: O	
Rock	SL: 8 10, 12MM	
	PH: 3,4	
	PZ: 3, 4	
	HEX: 8, 10, 12, 14MM	
	TORX: 40, 45, 50, 55	

I PIECE BLOW CASE WITH LOGO + COLOUR SLEEVE



### 82 PIECE SOCKET AND BIT SET

# 

82

PIECE

JRIVE



6P





Cr-V

STEEL

72 TOOTH

### JCB-4821-5


I/4" DR PART: I3 PIECE SOCKET 4,4.5, 5, 5.5, 6,7,8,9,10,11,12, 13, 14MM 2 PIECE EXTENSION BAR 2", 4" I PIECE FLEXIBLE EXTENSION 6" I PIECE FLEXIBLE EXTENSION 6" I PIECE UNIVERSAL JOINT I PIECE SPINNER HANDLE 6" I PIECE SLIDING T BAR I PIECE QICK RATCHET HANDLE I PIECE ADAPTOR I/2" DR. PART: 12 PIECE SOCKET 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32M 2 PIECE EXTENSION BAR 5", 10" 2 PIECE SPARK PLUG SOCKET 16, 21MM I PIECE J-WAY ADAPTOR: 3/8" (F(X 1/2" (M)) I PIECE UNIVERSAL JOINT I PIECE BIT HOLDER 9 PIECE BIT HOLDER 9 PIECE SPANNER 8, 10, 11,12,13,14, 17, 19, 22MM I7 PIECE BIT SOCKET: SL: 4, 5.5, 7MM PH: 1, 2 PZ: 1, 2 HEX 3,4,5,6MM TORX: 8, 10, 15, 20, 25, 30 I5 PIECE BIT:
2 PIECE EXTENSION BAR 2", 4" I PIECE FLEXIBLE EXTENSION 6" I PIECE UNIVERSAL JOINT I PIECE SPINNER HANDLE 6" I PIECE SLIDING T BAR I PIECE QICK RATCHET HANDLE I PIECE ADAPTOR 1/2" DR. PART: 12 PIECE SOCKET 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32M 2 PIECE EXTENSION BAR 5", 10" 2 PIECE SPARK PLUG SOCKET 16, 21MM I PIECE JAWAY ADAPTOR: 3/8" (F( X 1/2" (M)) I PIECE UNIVERSAL JOINT I PIECE OICK RATCHET HANDLE I PIECE BIT HOLDER 9 PIECE SPANNER 8, 10, 11, 12, 13, 14, 17, 19, 22MM 17 PIECE BIT SOCKET: SL: 4, 5.5, 7MM PH: 1, 2 PZ: 1, 2 HEX 3, 4, 5, 6MM TORX: 8, 10, 15, 20, 25, 30
I PIECE FLEXIBLE EXTENSION 6" I PIECE UNIVERSAL JOINT I PIECE SPINNER HANDLE 6" I PIECE SLIDING T BAR I PIECE QICK RATCHET HANDLE I PIECE ADAPTOR I/2" DR. PART: I2 PIECE SOCKET 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32M 2 PIECE SOCKET 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32M 2 PIECE SOCKET 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32M 2 PIECE SOCKET 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32M 2 PIECE SOCKET 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32M 2 PIECE SOCKET 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32M 2 PIECE SPARK PLUG SOCKET 16, 21MM 1 PIECE SPARK PLUG SOCKET 16, 21MM 1 PIECE J-WAY ADAPTOR: 3/8" (F(X 1/2" (M)) 1 PIECE UNIVERSAL JOINT 1 PIECE UNIVERSAL JOINT 1 PIECE QICK RATCHET HANDLE 1 PIECE BIT HOLDER 9 PIECE SPANNER 8, 10, 11, 12, 13, 14, 17, 19, 22MM 17 PIECE BIT SOCKET: SL: 4, 5.5, 7MM PH: 1, 2 PZ: 1, 2 HEX 3, 4, 5, 6MM TORX: 8, 10, 15, 20, 25, 30
I PIECE UNIVERSAL JOINT I PIECE SPINNER HANDLE 6" I PIECE SLIDING T BAR I PIECE QICK RATCHET HANDLE I PIECE QICK RATCHET HANDLE I PIECE ADAPTOR I/2" DR. PART: I2 PIECE SOCKET 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32M 2 PIECE SOCKET 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32M 2 PIECE EXTENSION BAR 5", 10" 2 PIECE SPARK PLUG SOCKET 16, 21MM I PIECE SPARK PLUG SOCKET 16, 21MM I PIECE 3-WAY ADAPTOR: 3/8" (F( X 1/2" (M)) I PIECE UNIVERSAL JOINT I PIECE QICK RATCHET HANDLE I PIECE BIT HOLDER 9 PIECE SPANNER 8, 10, 11, 12, 13, 14, 17, 19, 22MM I7 PIECE BIT SOCKET: SL: 4, 5, 5, 7MM PH: 1, 2 PZ: 1, 2 HEX 3, 4, 5, 6MM TORX: 8, 10, 15, 20, 25, 30
I PIECE SPINNER HANDLE 6" I PIECE SLIDING T BAR I PIECE QICK RATCHET HANDLE I PIECE ADAPTOR I/2" DR. PART: I2 PIECE SOCKET 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32M 2 PIECE EXTENSION BAR 5", 10" 2 PIECE SPARK PLUG SOCKET 16, 21MM I PIECE 3-WAY ADAPTOR: 3/8" (F( X 1/2" (M)) I PIECE UNIVERSAL JOINT I PIECE QICK RATCHET HANDLE I PIECE BIT HOLDER 9 PIECE SPANNER 8, 10, 11, 12, 13, 14, 17, 19, 22MM I7 PIECE BIT SOCKET: SL: 4, 5, 5, 7MM PH: 1, 2 PZ: 1, 2 HEX 3,4,5,6MM TORX: 8, 10, 15, 20, 25, 30
<ul> <li>I PIECE SLIDING T BAR</li> <li>I PIECE QICK RATCHET HANDLE</li> <li>I PIECE ADAPTOR</li> <li>I/2" DR. PART:</li> <li>I2 PIECE SOCKET 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32M</li> <li>2 PIECE EXTENSION BAR 5", 10"</li> <li>2 PIECE SPARK PLUG SOCKET 16, 21MM</li> <li>I PIECE 3-WAY ADAPTOR: 3/8" (F( X 1/2" (M))</li> <li>I PIECE UNIVERSAL JOINT</li> <li>I PIECE QICK RATCHET HANDLE</li> <li>I PIECE BIT HOLDER</li> <li>9 PIECE SPANNER 8, 10, 11, 12, 13, 14, 17, 19, 22MM</li> <li>I7 PIECE BIT SOCKET:</li> <li>SL: 4, 5.5, 7MM</li> <li>PH: 1, 2</li> <li>PZ: 1, 2</li> <li>HEX 3,4,5,6MM</li> <li>TORX: 8, 10, 15, 20, 25, 30</li> </ul>
I PIECE QICK RATCHET HANDLE I PIECE ADAPTOR I/2" DR. PART: I2 PIECE SOCKET 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32M 2 PIECE EXTENSION BAR 5", 10" 2 PIECE SPARK PLUG SOCKET 16, 21MM I PIECE 3-WAY ADAPTOR: 3/8" (F( X 1/2" (M) I PIECE UNIVERSAL JOINT I PIECE UNIVERSAL JOINT I PIECE QICK RATCHET HANDLE I PIECE BIT HOLDER 9 PIECE SPANNER 8, 10, 11, 12, 13, 14, 17, 19, 22MM I7 PIECE BIT SOCKET: SL: 4, 5.5, 7MM PH: 1, 2 PZ: 1, 2 HEX 3, 4, 5, 6MM TORX: 8, 10, 15, 20, 25, 30
I PIECE ADAPTOR I/2" DR. PART: I2 PIECE SOCKET 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32M 2 PIECE EXTENSION BAR 5", 10" 2 PIECE SPARK PLUG SOCKET 16, 21MM I PIECE 3-WAY ADAPTOR: 3/8" (F( X 1/2" (M) I PIECE UNIVERSAL JOINT I PIECE UNIVERSAL JOINT I PIECE QICK RATCHET HANDLE I PIECE BIT HOLDER 9 PIECE SPANNER 8, 10, 11, 12, 13, 14, 17, 19, 22MM I7 PIECE BIT SOCKET: SL: 4, 5.5, 7MM PH: 1, 2 PZ: 1, 2 HEX 3, 4, 5, 6MM TORX: 8, 10, 15, 20, 25, 30
I/2" DR. PART: 12 PIECE SOCKET 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32M 2 PIECE EXTENSION BAR 5", 10" 2 PIECE SPARK PLUG SOCKET 16, 21MM 1 PIECE 3-WAY ADAPTOR: 3/8" (F(X 1/2" (M) 1 PIECE UNIVERSAL JOINT 1 PIECE QICK RATCHET HANDLE 1 PIECE BIT HOLDER 9 PIECE SPANNER 8, 10, 11, 12, 13, 14, 17, 19, 22MM 17 PIECE BIT SOCKET: SL: 4, 5.5, 7MM PH: 1, 2 PZ: 1, 2 HEX 3, 4, 5, 6MM TORX: 8, 10, 15, 20, 25, 30
12 PIECE       SOCKET 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32M         2 PIECE       EXTENSION BAR 5", 10"         2 PIECE       SPARK PLUG SOCKET 16, 21MM         1 PIECE       3-WAY ADAPTOR: 3/8" (F( X 1/2" (M))         1 PIECE       UNIVERSAL JOINT         1 PIECE       QICK RATCHET HANDLE         1 PIECE       BIT HOLDER         9 PIECE       SPANNER 8, 10, 11,12,13,14, 17, 19, 22MM         17 PIECE       BIT SOCKET:         SL: 4, 5.5, 7MM         PH: 1, 2         PZ: 1, 2         HEX 3,4,5,6MM         TORX: 8, 10, 15, 20, 25, 30
2 PIECE EXTENSION BAR 5", 10" 2 PIECE SPARK PLUG SOCKET 16, 21MM 1 PIECE 3-WAY ADAPTOR: 3/8" (F( X 1/2" (M)) 1 PIECE UNIVERSAL JOINT 1 PIECE QICK RATCHET HANDLE 1 PIECE BIT HOLDER 9 PIECE SPANNER 8, 10, 11, 12, 13, 14, 17, 19, 22MM 17 PIECE BIT SOCKET: SL: 4, 5.5, 7MM PH: 1, 2 PZ: 1, 2 HEX 3, 4, 5, 6MM TORX: 8, 10, 15, 20, 25, 30
2 PIECE SPARK PLUG SOCKET 16, 2IMM 1 PIECE 3-WAY ADAPTOR: 3/8" (F( X 1/2" (M)) 1 PIECE UNIVERSAL JOINT 1 PIECE QICK RATCHET HANDLE 1 PIECE BIT HOLDER 9 PIECE SPANNER 8, 10, 11,12,13,14, 17, 19, 22MM 17 PIECE BIT SOCKET: SL: 4, 5.5, 7MM PH: 1, 2 PZ: 1, 2 HEX 3,4,5,6MM TORX: 8, 10, 15, 20, 25, 30
I PIECE 3-WAY ADAPTOR: 3/8" (F( X 1/2" (M) I PIECE UNIVERSAL JOINT I PIECE QICK RATCHET HANDLE I PIECE BIT HOLDER 9 PIECE SPANNER 8, 10, 11,12,13,14, 17, 19, 22MM I7 PIECE BIT SOCKET: SL: 4, 5.5, 7MM PH: 1, 2 PZ: 1, 2 HEX 3,4,5,6MM TORX: 8, 10, 15, 20, 25, 30
I PIECE UNIVERSAL JOINT I PIECE QICK RATCHET HANDLE I PIECE BIT HOLDER 9 PIECE SPANNER 8, 10, 11,12,13,14, 17, 19, 22MM I7 PIECE BIT SOCKET: SL: 4, 5.5, 7MM PH: 1, 2 PZ: 1, 2 HEX 3,4,5,6MM TORX: 8, 10, 15, 20, 25, 30
I PIECE QICK RATCHET HANDLE I PIECE BIT HOLDER 9 PIECE SPANNER 8, 10, 11,12,13,14, 17, 19, 22MM I7 PIECE BIT SOCKET: SL: 4, 5.5, 7MM PH: 1, 2 PZ: 1, 2 HEX 3,4,5,6MM TORX: 8, 10, 15, 20, 25, 30
I PIECE BIT HOLDER 9 PIECE SPANNER 8, 10, 11,12,13,14, 17, 19, 22MM I7 PIECE BIT SOCKET: SL: 4, 5.5, 7MM PH: 1, 2 PZ: 1, 2 HEX 3,4,5,6MM TORX: 8, 10, 15, 20, 25, 30
9 PIECE SPANNER 8, 10, 11,12,13,14, 17, 19, 22MM 17 PIECE BIT SOCKET: SL: 4, 5.5, 7MM PH: 1, 2 PZ: 1, 2 HEX 3,4,5,6MM TORX: 8, 10, 15, 20, 25, 30
I7 PIECE BIT SOCKET: SL: 4, 5.5, 7MM PH: 1, 2 PZ: 1, 2 HEX 3,4,5,6MM TORX: 8, 10, 15, 20, 25, 30
SL: 4, 5.5, 7MM PH: 1, 2 PZ: 1, 2 HEX 3,4,5,6MM TORX: 8, 10, 15, 20, 25, 30
PH: 1, 2 PZ: 1, 2 HEX 3,4,5,6MM TORX: 8, 10, 15, 20, 25, 30
PZ: 1, 2 HEX 3,4,5,6MM TORX: 8, 10, 15, 20, 25, 30
HEX 3,4,5,6MM TORX: 8, 10, 15, 20, 25, 30
TORX: 8, 10, 15, 20, 25, 30
I5 PIECE BIT:
SL: 8 10, 12MM
PH 3,4
PZ 3,4
HEX 8, 10, 12, 14MM
TORX 40, 45, 50, 55
I PIECE BLOW CASE WITH LOGO + COLOUR SLEEVE





# SPANAERS

JCB SPANNERS ENGINEERED FROM HIGH-GRADE MATERIALS, OUR SPANNERS RESIST WEAR AND TEAR, PROMISING A LONG LIFESPAN EVEN IN THE MOST CHALLENGING CONDITIONS. THEIR ERGONOMIC DESIGN ENSURES A COMFORTABLE GRIP, REDUCING USER FATIGUE AND ENHANCING EFFICIENCY.

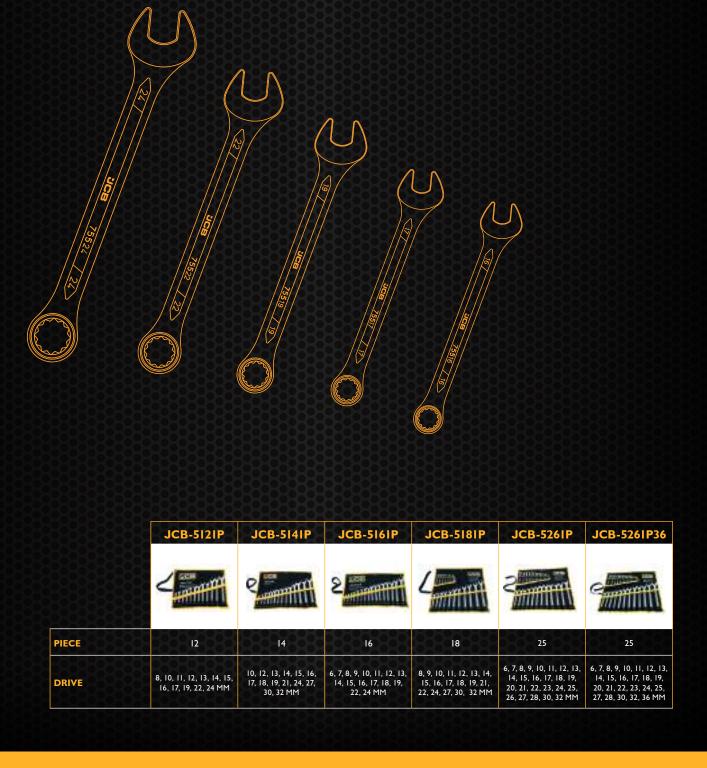



### 12 PIECE COMBINATION SPANNER SET

### JCB-5121P



8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 22, 24 MM





CASE


INCLUDED

8 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 19 / 22 / 24 mm

**14 PIECE COMBINATION SPANNER SET** 

JCB-5141P



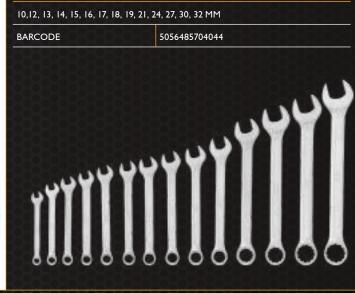

10 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 21 / 24 / 27 / 30 / 32 mm



**SPECIFICATION** 

CASE INCLUDED °JCB



### **16 PIECE COMBINATION SPANNER SET**

### JCB-5161P




6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 1	7, 18, 19, 22, 24 MM
BARCODE	5056485704020





## 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 22 / 24 mm

### **18 PIECE COMBINATION SPANNER SET**



CASE

INCLUDED



8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 21 / 22 / 24 / 27 / 30 / 32 mm

### SPECIFICATION

Cr-

8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32 MM BARCODE 5056485704015



CASE

INCLUDED



### **25 PIECE COMBINATION SPANNER SET**





CASE

INCLUDED

CASE

INCLUDED

XOL

**JCB-5261P36** 

6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 /20 / 21 / 22 / 23 / 24 / 25 / 26 / 27 / 28 / 30 / 32 mm

**25 PIECE COMBINATION SPANNER SET** 

### **SPECIFICATION**



BARCODE

5056485704075

6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 20 / 21 / 22 / 23 / 24 /25 / 27 / 28 / 30 / 32 / 36 mm



ໍມcB

### COMBINATION SPANNERS



### SPECIFICATION

75504

JCB-75506	6MM COMBINATION SPANNER	6mm
JCB-75507	7MM COMBINATION SPANNER	7mm
JCB-75508	8MM COMBINATION SPANNER	8mm
JCB-75509	9MM COMBINATION SPANNER	9mm
JCB-75510	10MM COMBINATION SPANNER	10mm
JCB-75511	I I MM COMBINATION SPANNER	llmm
JCB-75512	12MM COMBINATION SPANNER	I2mm
JCB-75513	13MM COMBINATION SPANNER	13mm
JCB-75514	14MM COMBINATION SPANNER	l4mm
JCB-75515	15MM COMBINATION SPANNER	15mm
JCB-75516	16MM COMBINATION SPANNER	16mm
JCB-75517	17MM COMBINATION SPANNER	I7mm
JCB-75518	18MM COMBINATION SPANNER	18mm
JCB-75519	19MM COMBINATION SPANNER	19mm
JCB-75520	20MM COMBINATION SPANNER	20mm
JCB-75521	21 MM COMBINATION SPANNER	21mm
JCB-75523	23MM COMBINATION SPANNER	23mm
JCB-75524	24MM COMBINATION SPANNER	24mm
JCB-75525	25MM COMBINATION SPANNER	25mm
JCB-75526	26MM COMBINATION SPANNER	26mm
JCB-75527	27MM COMBINATION SPANNER	27mm
JCB-75528	28MM COMBINATION SPANNER	28mm
JCB-75529	29MM COMBINATION SPANNER	29mm
JCB-75530	30MM COMBINATION SPANNER	30mm
JCB-75532	32MM COMBINATION SPANNER	32mm







## **REGIONAL OFFICES**

### Poland

Trade House Forsage Instrument Pol Sp. Z. O.O. VAT UE: PL5423283539 ul. Św. Proroka Eliasza 8, 15-568 Białystok, POLSKA Tel: 48 723 622 021 https://jcbtools.eu/

### Dubai

27 20th St - Al Khabaisi Dubai - United Arab Emirates Tel:+971524341734 https://rockforce.ae/

### **Hong Kong** Forsage International Ltd.

D2, 16th Floor, TML Tower, no. 3 Hoi Shing Road, Tsuen Wan, NT, Hong Kong Tel.: +852 6389 5977

### Azerbaijan

FORSAGE CAUCASUS" LLC Azerbaijan, Baku , Babek avenue, Kamran Afbari 37B GSM: +994 702005066 www.forsage.az

### Georgia

LLC "Forsage Georgia" st. Tsereteli R. Agladze No. 18, Tbilisi Tel: 568447420 www.bt-ingenieros.com

### Kazakhstan

Prime Tools LLP 202, Dostyk Ave., Almaty, Kazakhstan Tel: +7 727 325 00 77 www.prime-tools.kz

### Uzbekistan

LLC "FORSAGE Tool Asia" Uzgarish, st. Navruz 2a, Sergeli district Tashkent, Uzbekistan Tel:+998900181813 www.forsage-tool.uz



Lithuania

UAB "Fagihi Baltic" tel./fax: +370 5 2405006 Titnago G. 78 LT-02300 VILNIUS www.irankiaiforce.lt

### Ukraine

"TH "Forsage-Instrument" LLC 04128, Ukraine, Kiev, Plodovaya St. I Tel: +7 727 325 00 77

### **Turkey**

Forsage Turkey Ic ve Dis Tic. Ltd. Sti. Alemdag cad. No:402A Ümraniye / Istanbul / Turkey +90 216 210 19 01 www.forsageturkey.com.tr/